





E000	ELECTRICAL & LIGHTING LEGENDS & DRAWING LIST
E100	ELECTRICAL & LIGHTING LEGENDS & DRAWING LIST
E200	LEVEL 0 - WASHROOM LIGHTING & POWER DEMOLITION PLAN
E201	PARTIAL LEVEL 0,1 & 2 - ELEVATOR DEMOLITION PLAN
E300	LEVEL 0 - WASHROOM LIGHTING & POWER PROPOSED PLAN
E301	PARTIAL LEVEL 0,1 & 2 - ELEVATOR PROPOSED PLAN
E302	PARTIAL LEVEL 0,1 & 2 - ELEVATOR LIGHTING PROPOSED PLAN

INFORMATION AVAILABLE TO BIDDERS




True North

[illegible]


General Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawings. Drawings shall not be used for construction purposes until issued by the Architect for construction.

Halton District School Board
Burlington, Ontario


Scale:	Date:
Drawn by:	Checked by: 25/11/2022
Job No.	Drawing No.

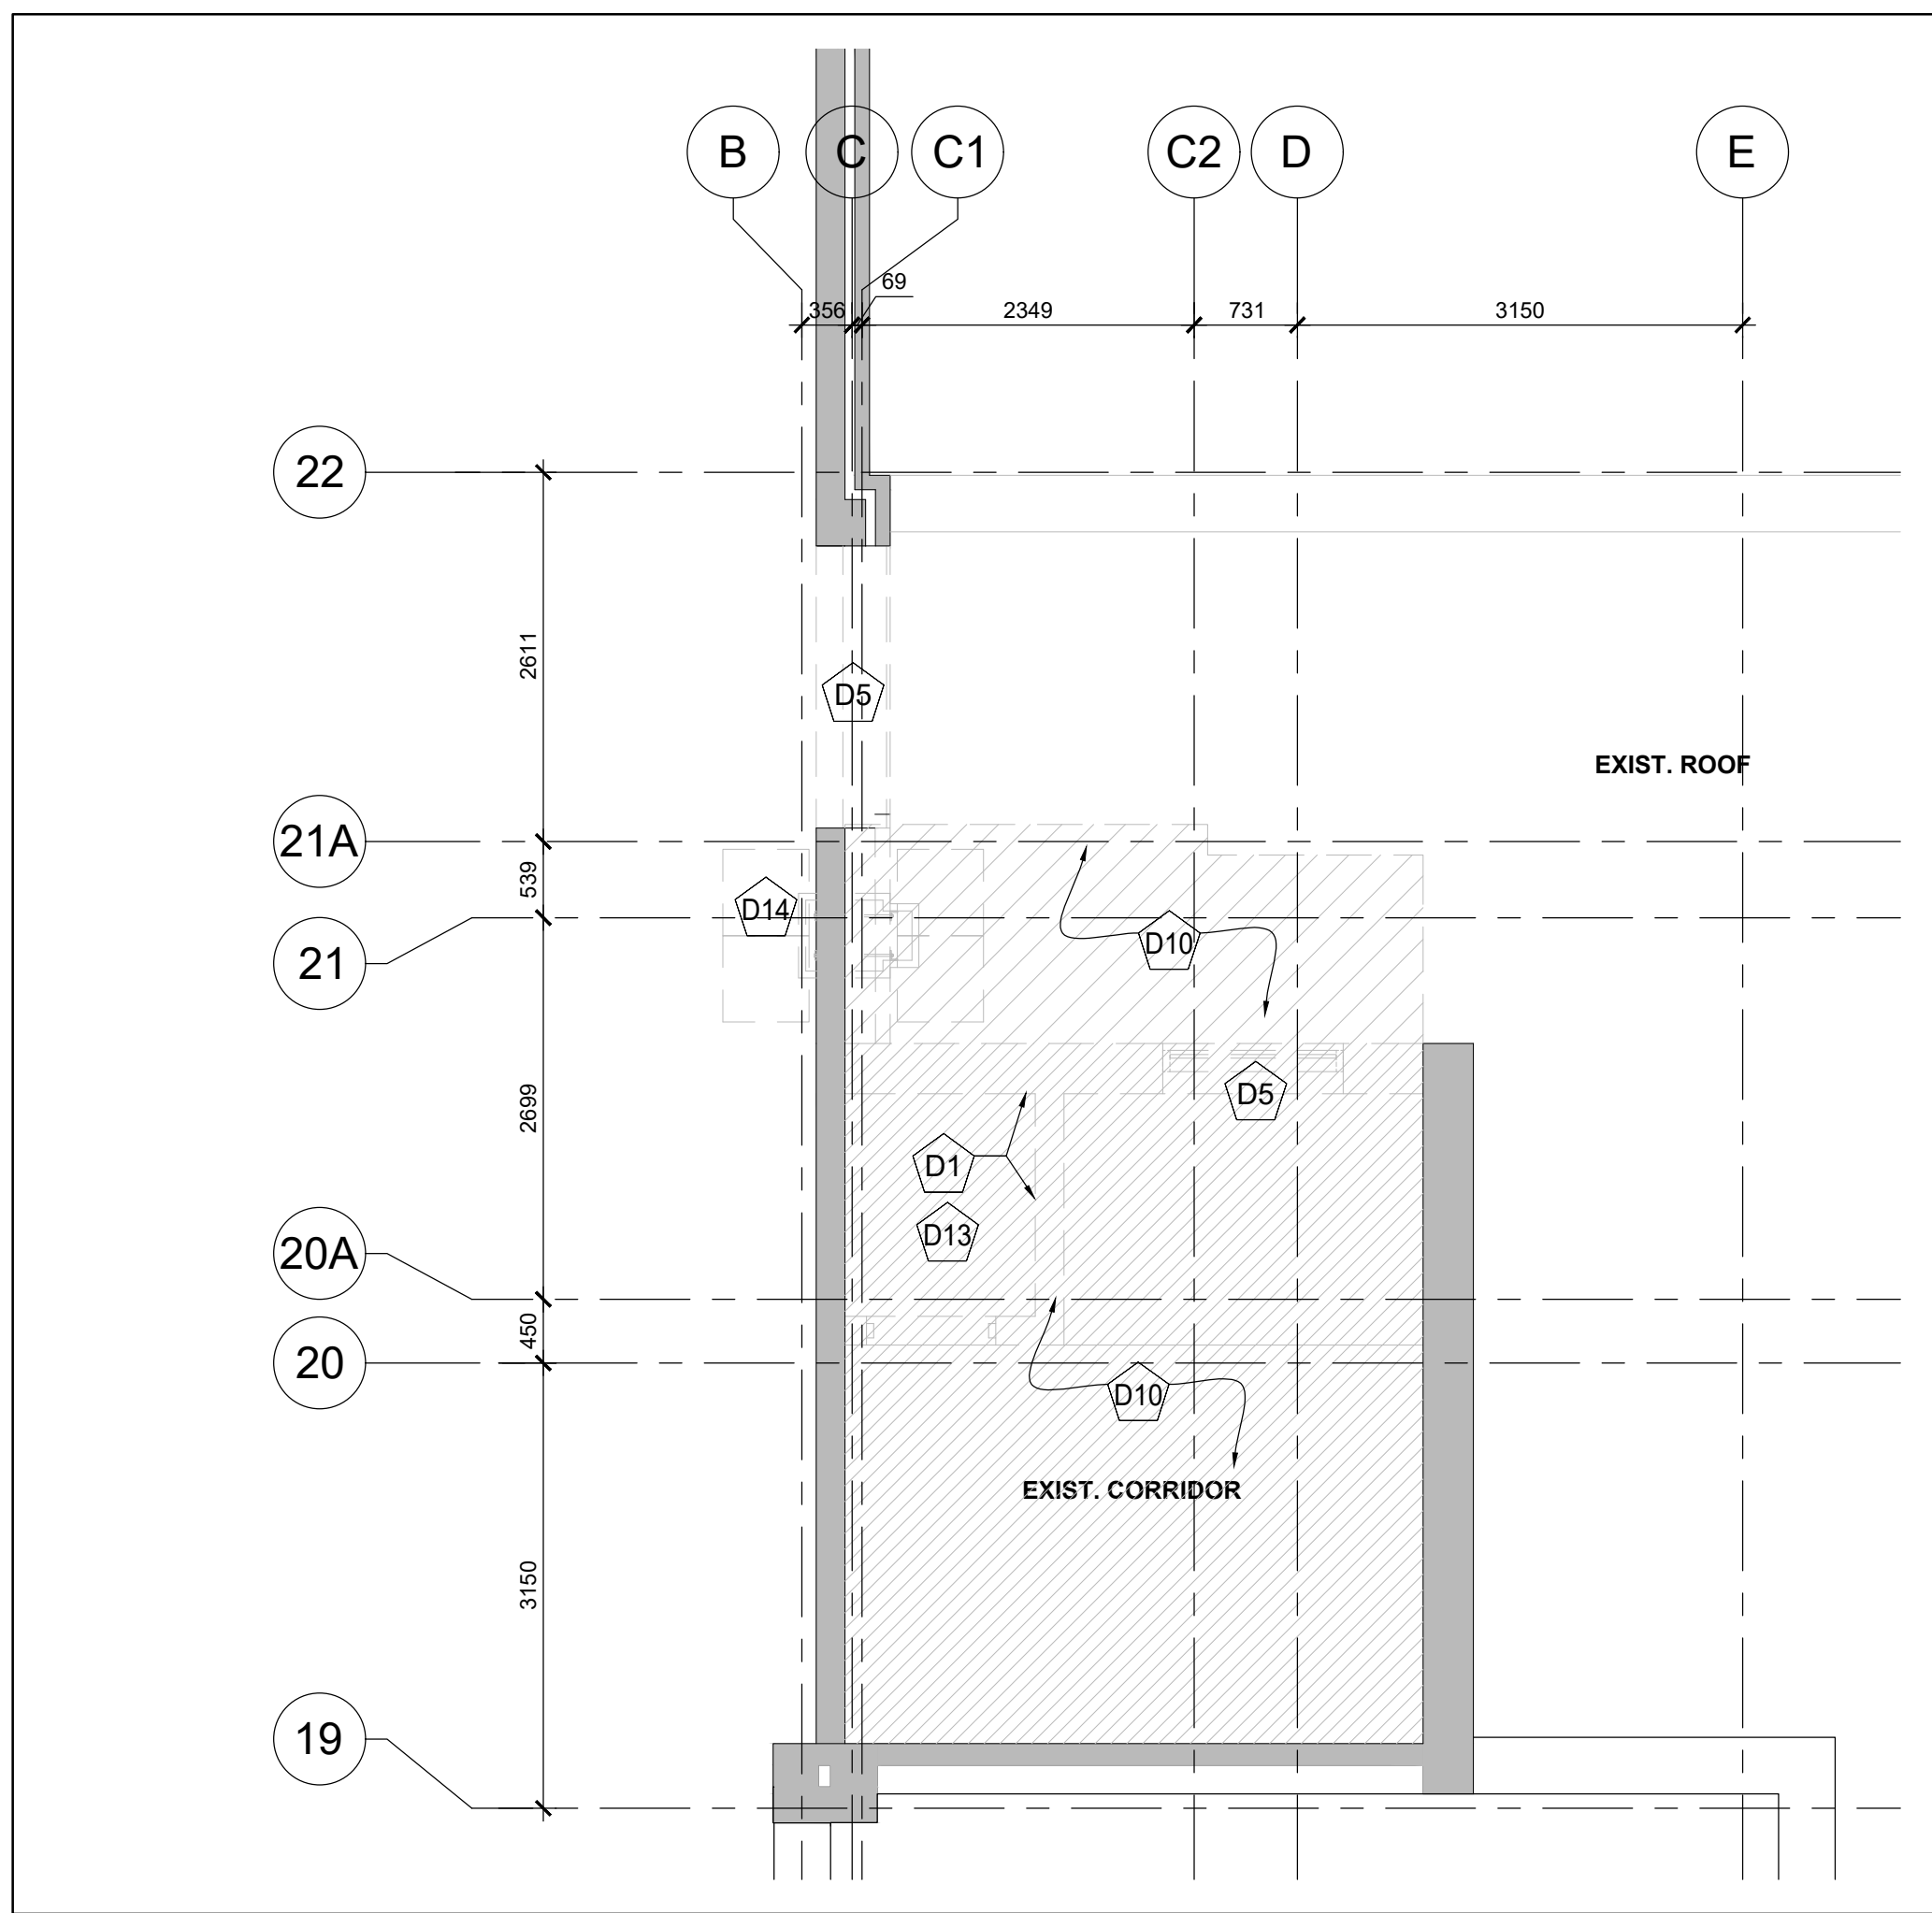


7 PARTIAL FLOOR PLAN - LEVEL 2 & ROOF
A101-D 1:50

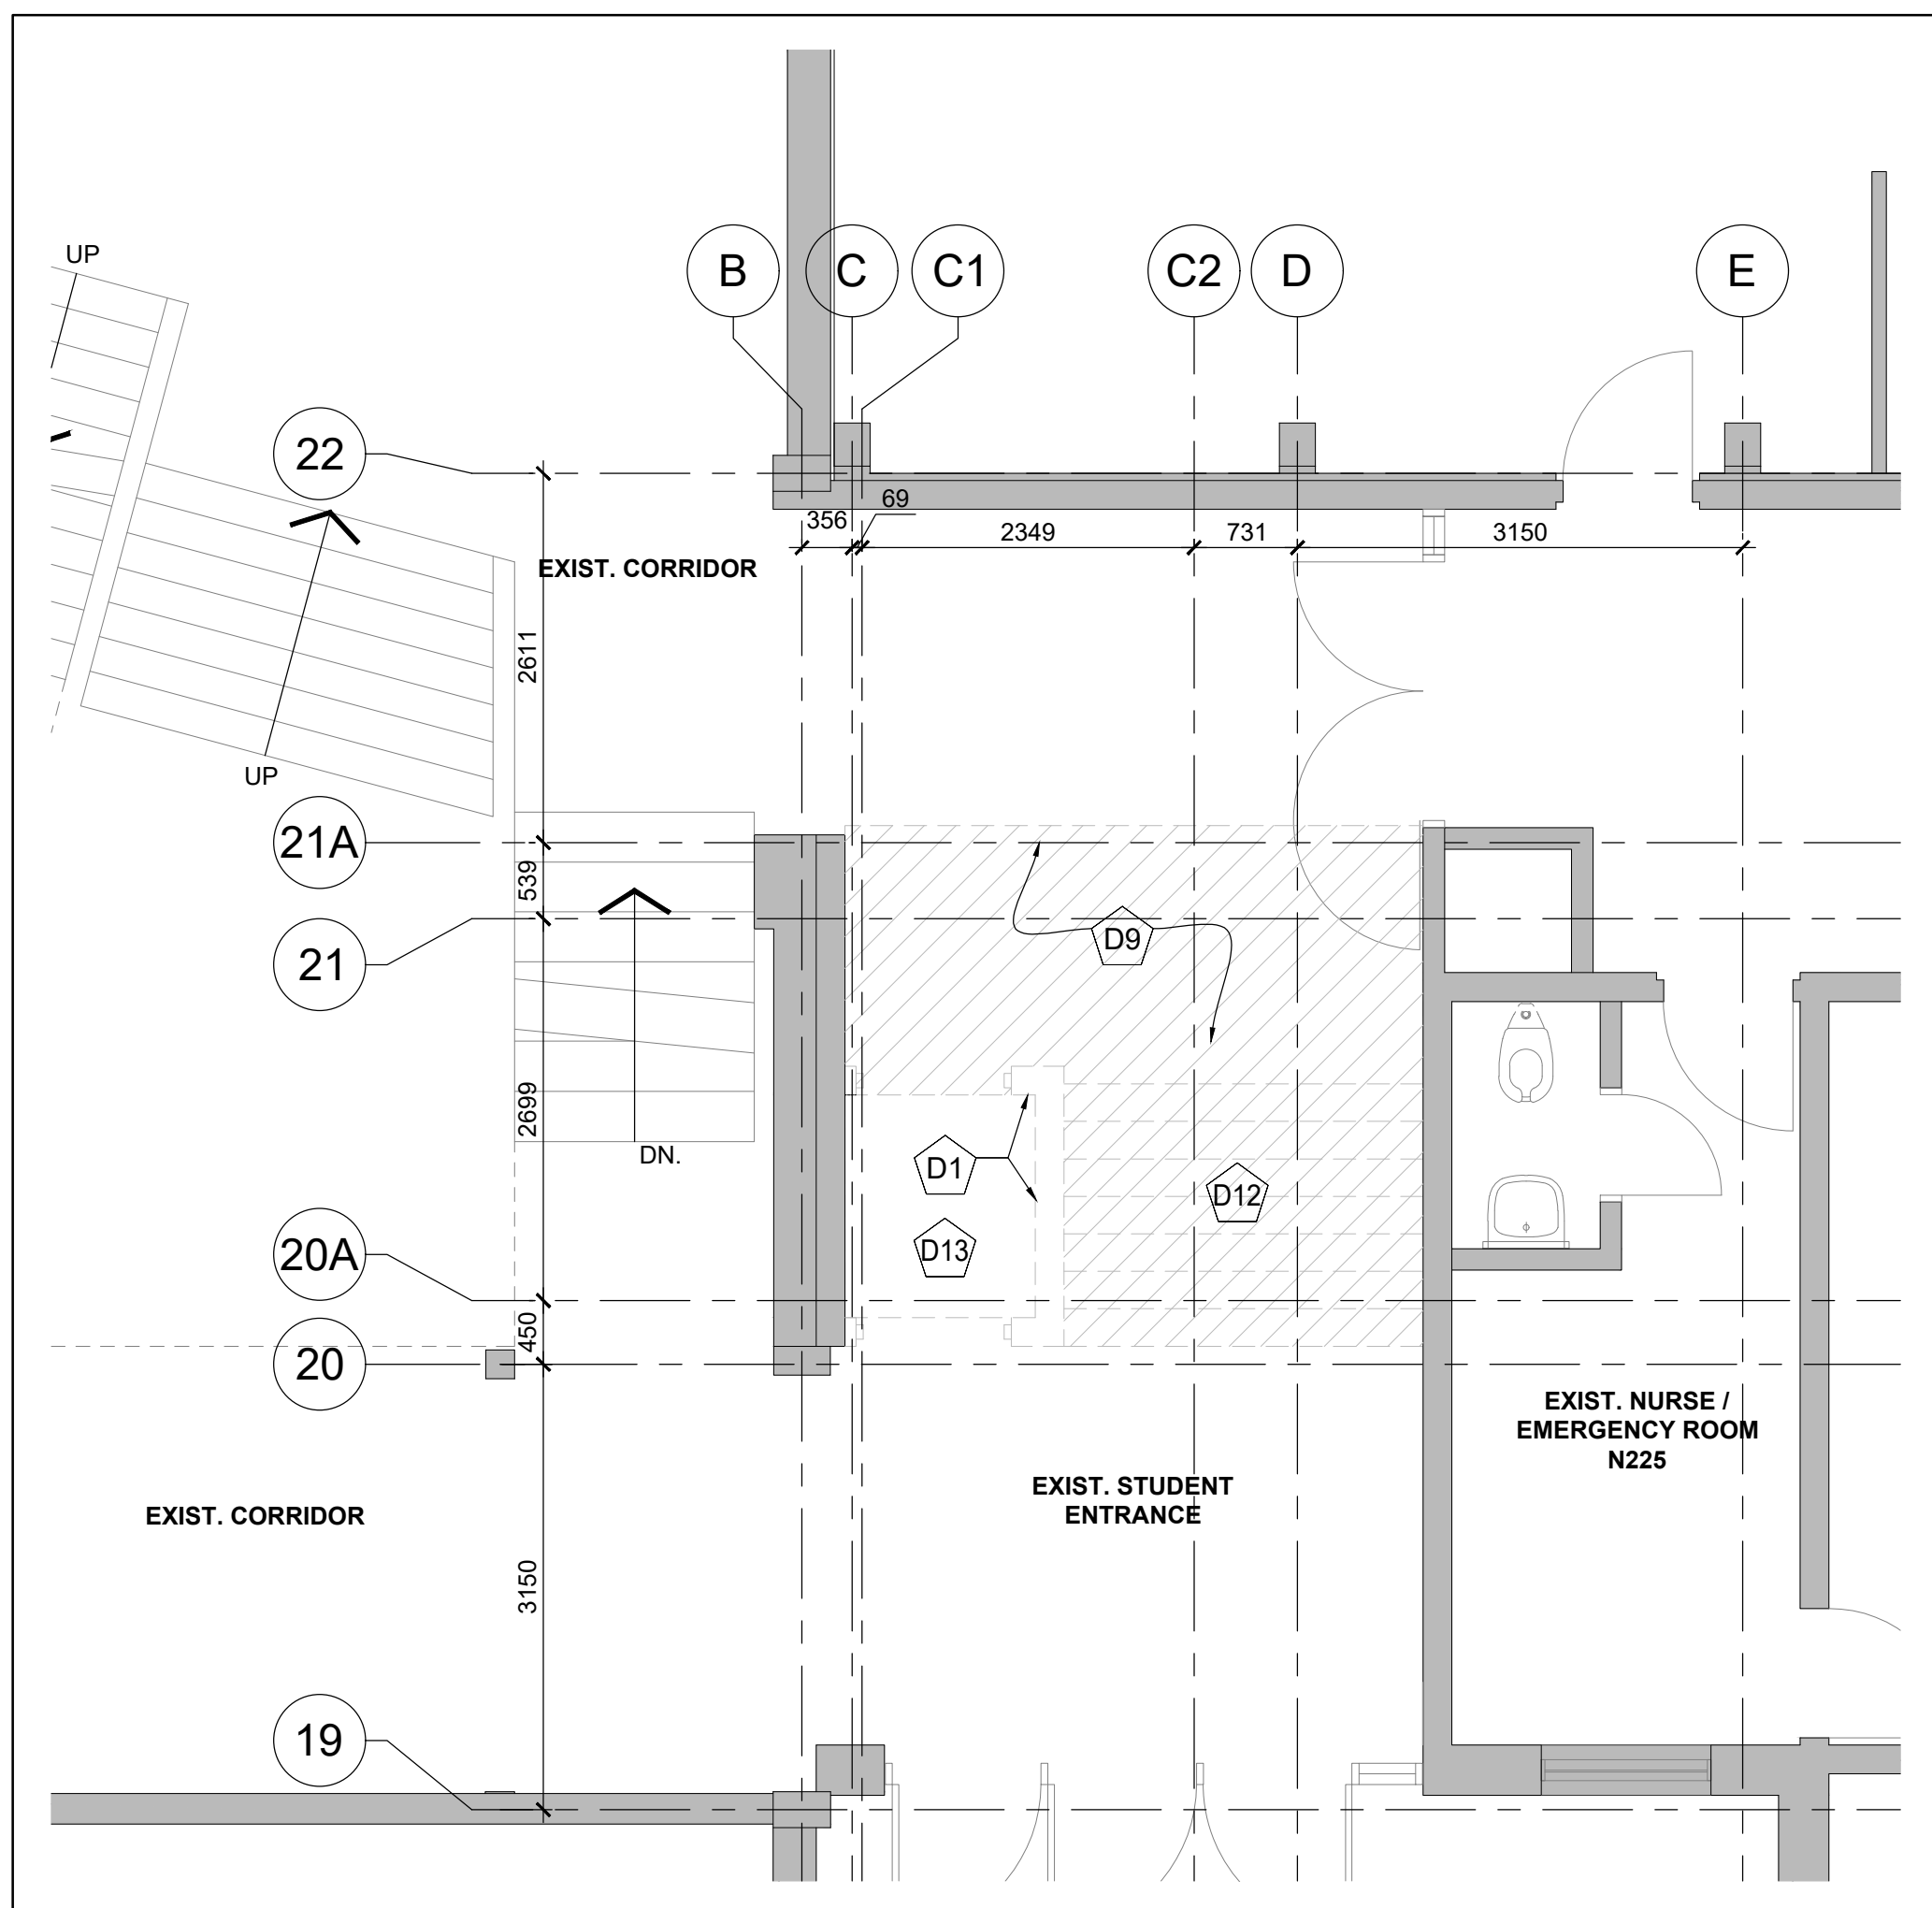


5 PARTIAL FLOOR PLAN - LEVEL 1 & 1A
A101-D 1:50

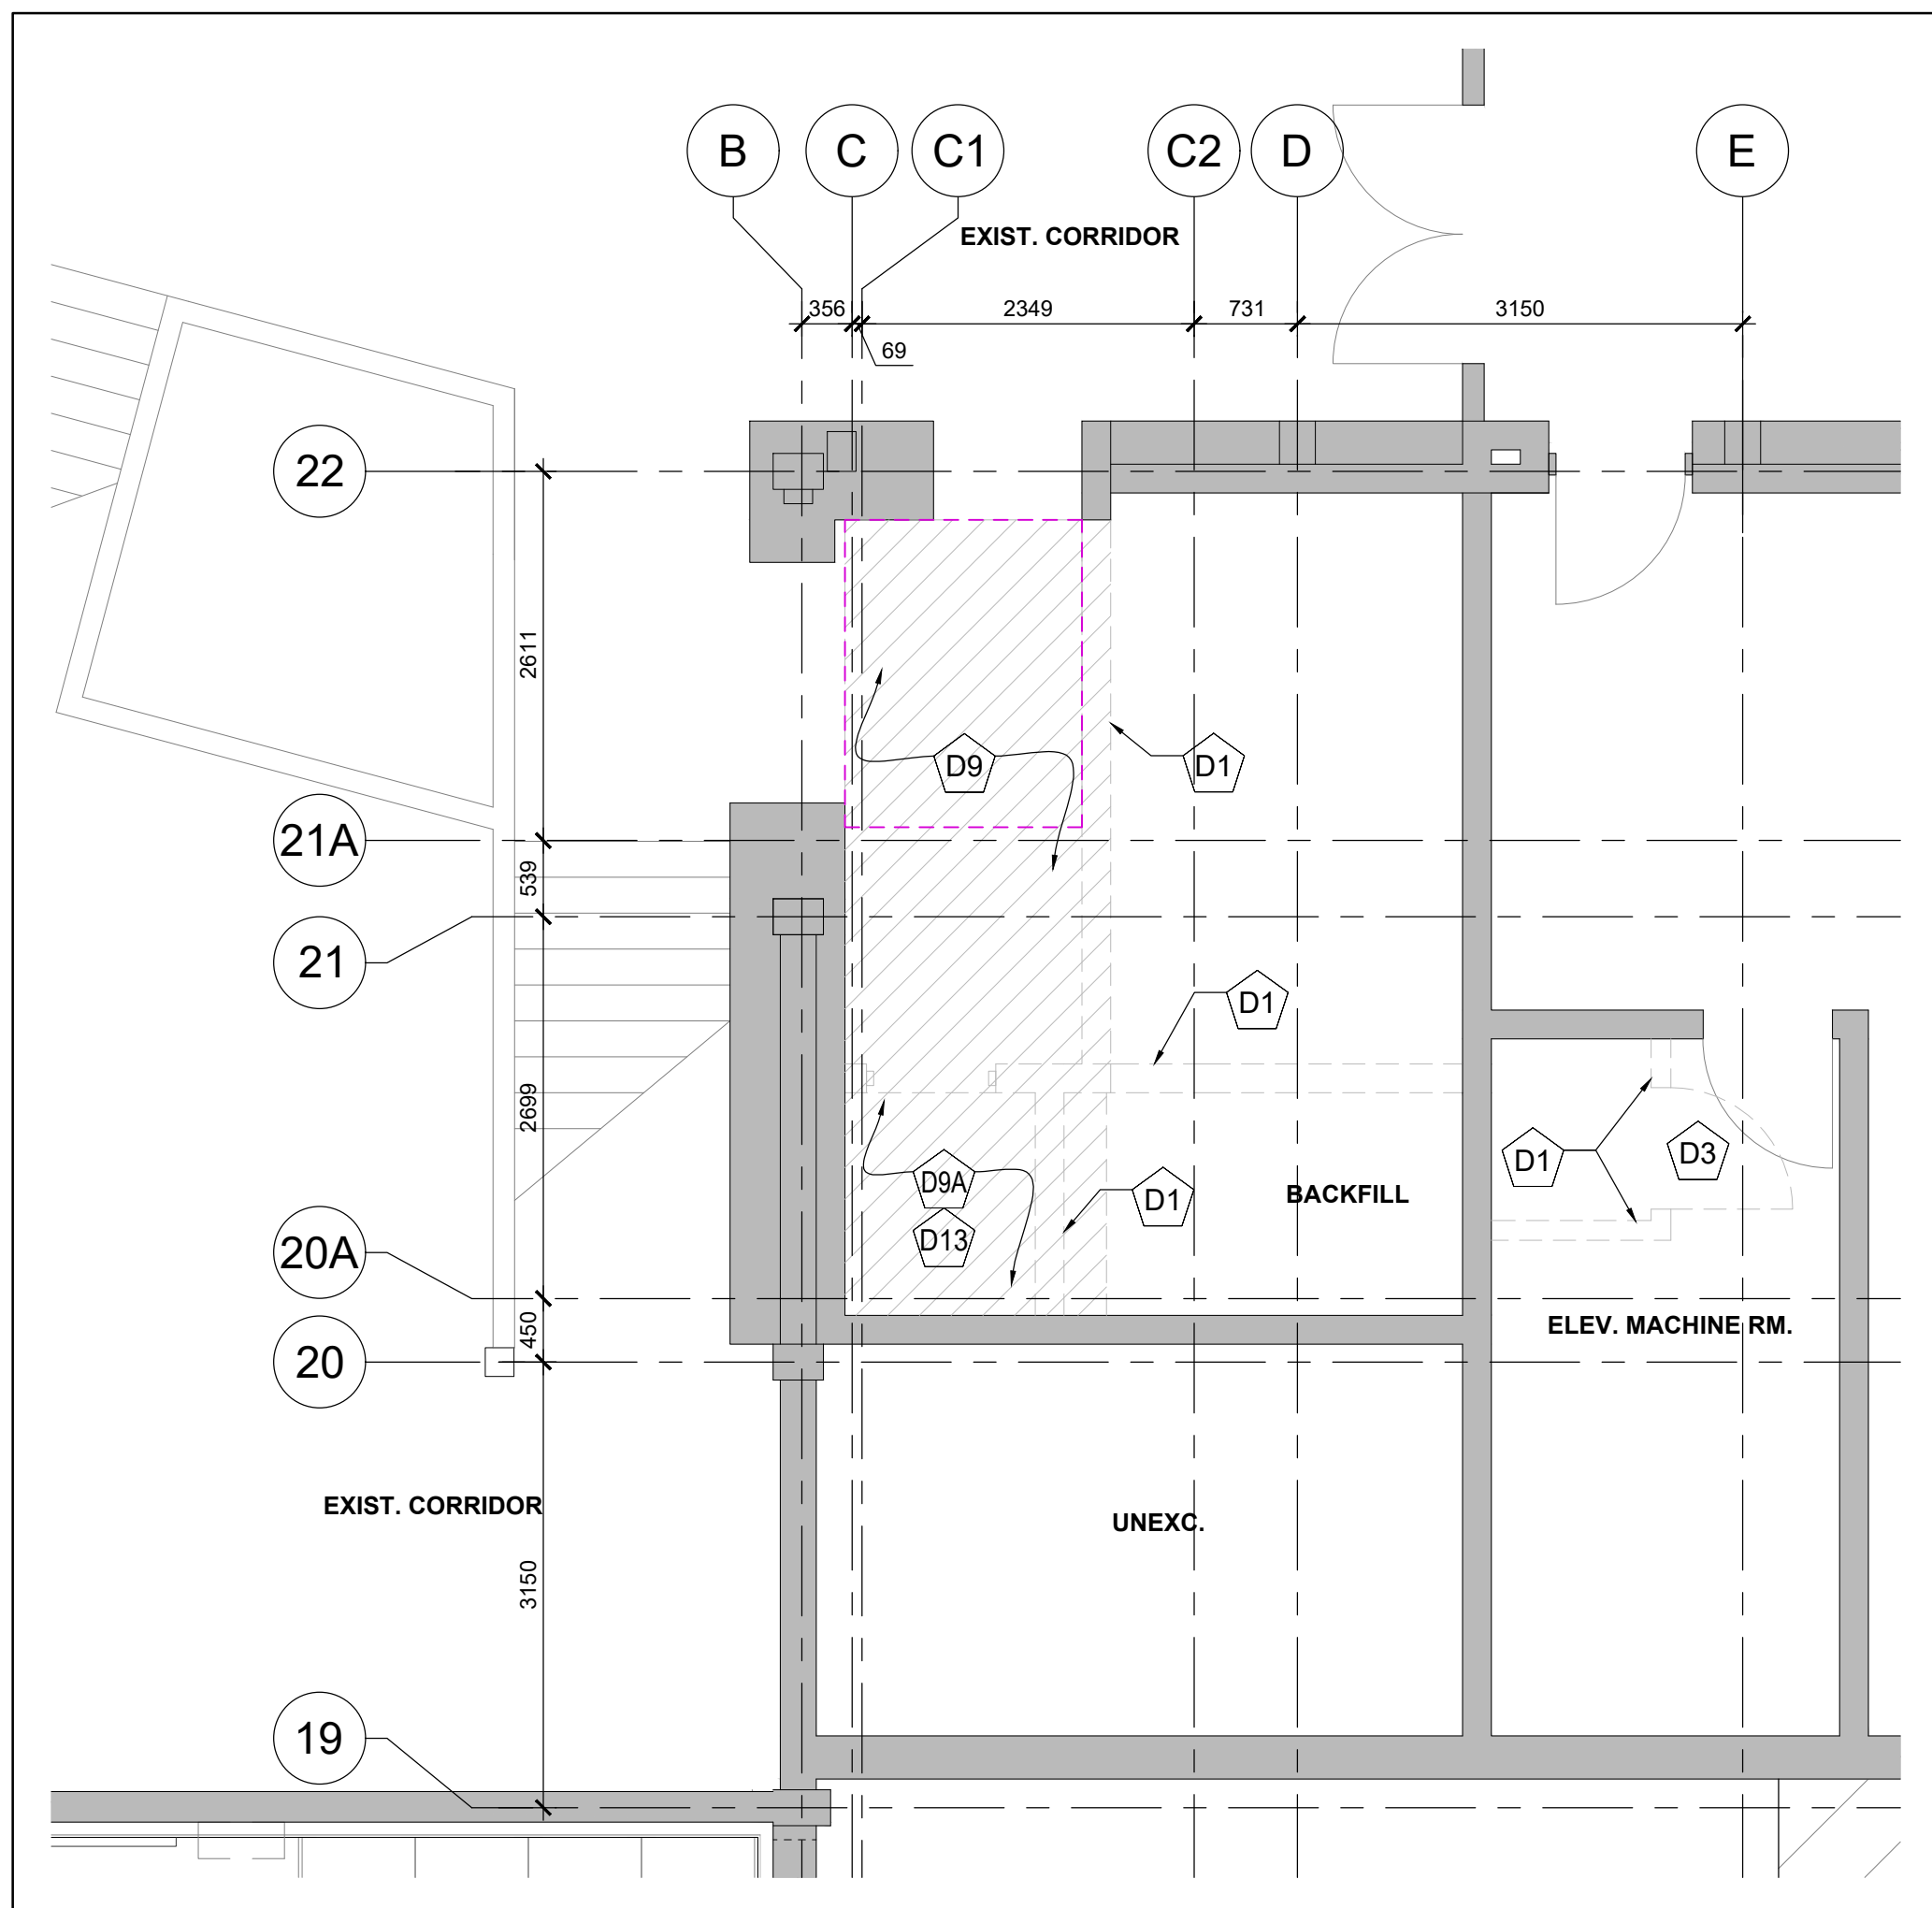


3 PARTIAL FLOOR PLAN - LEVEL 0
A101-D 1:50

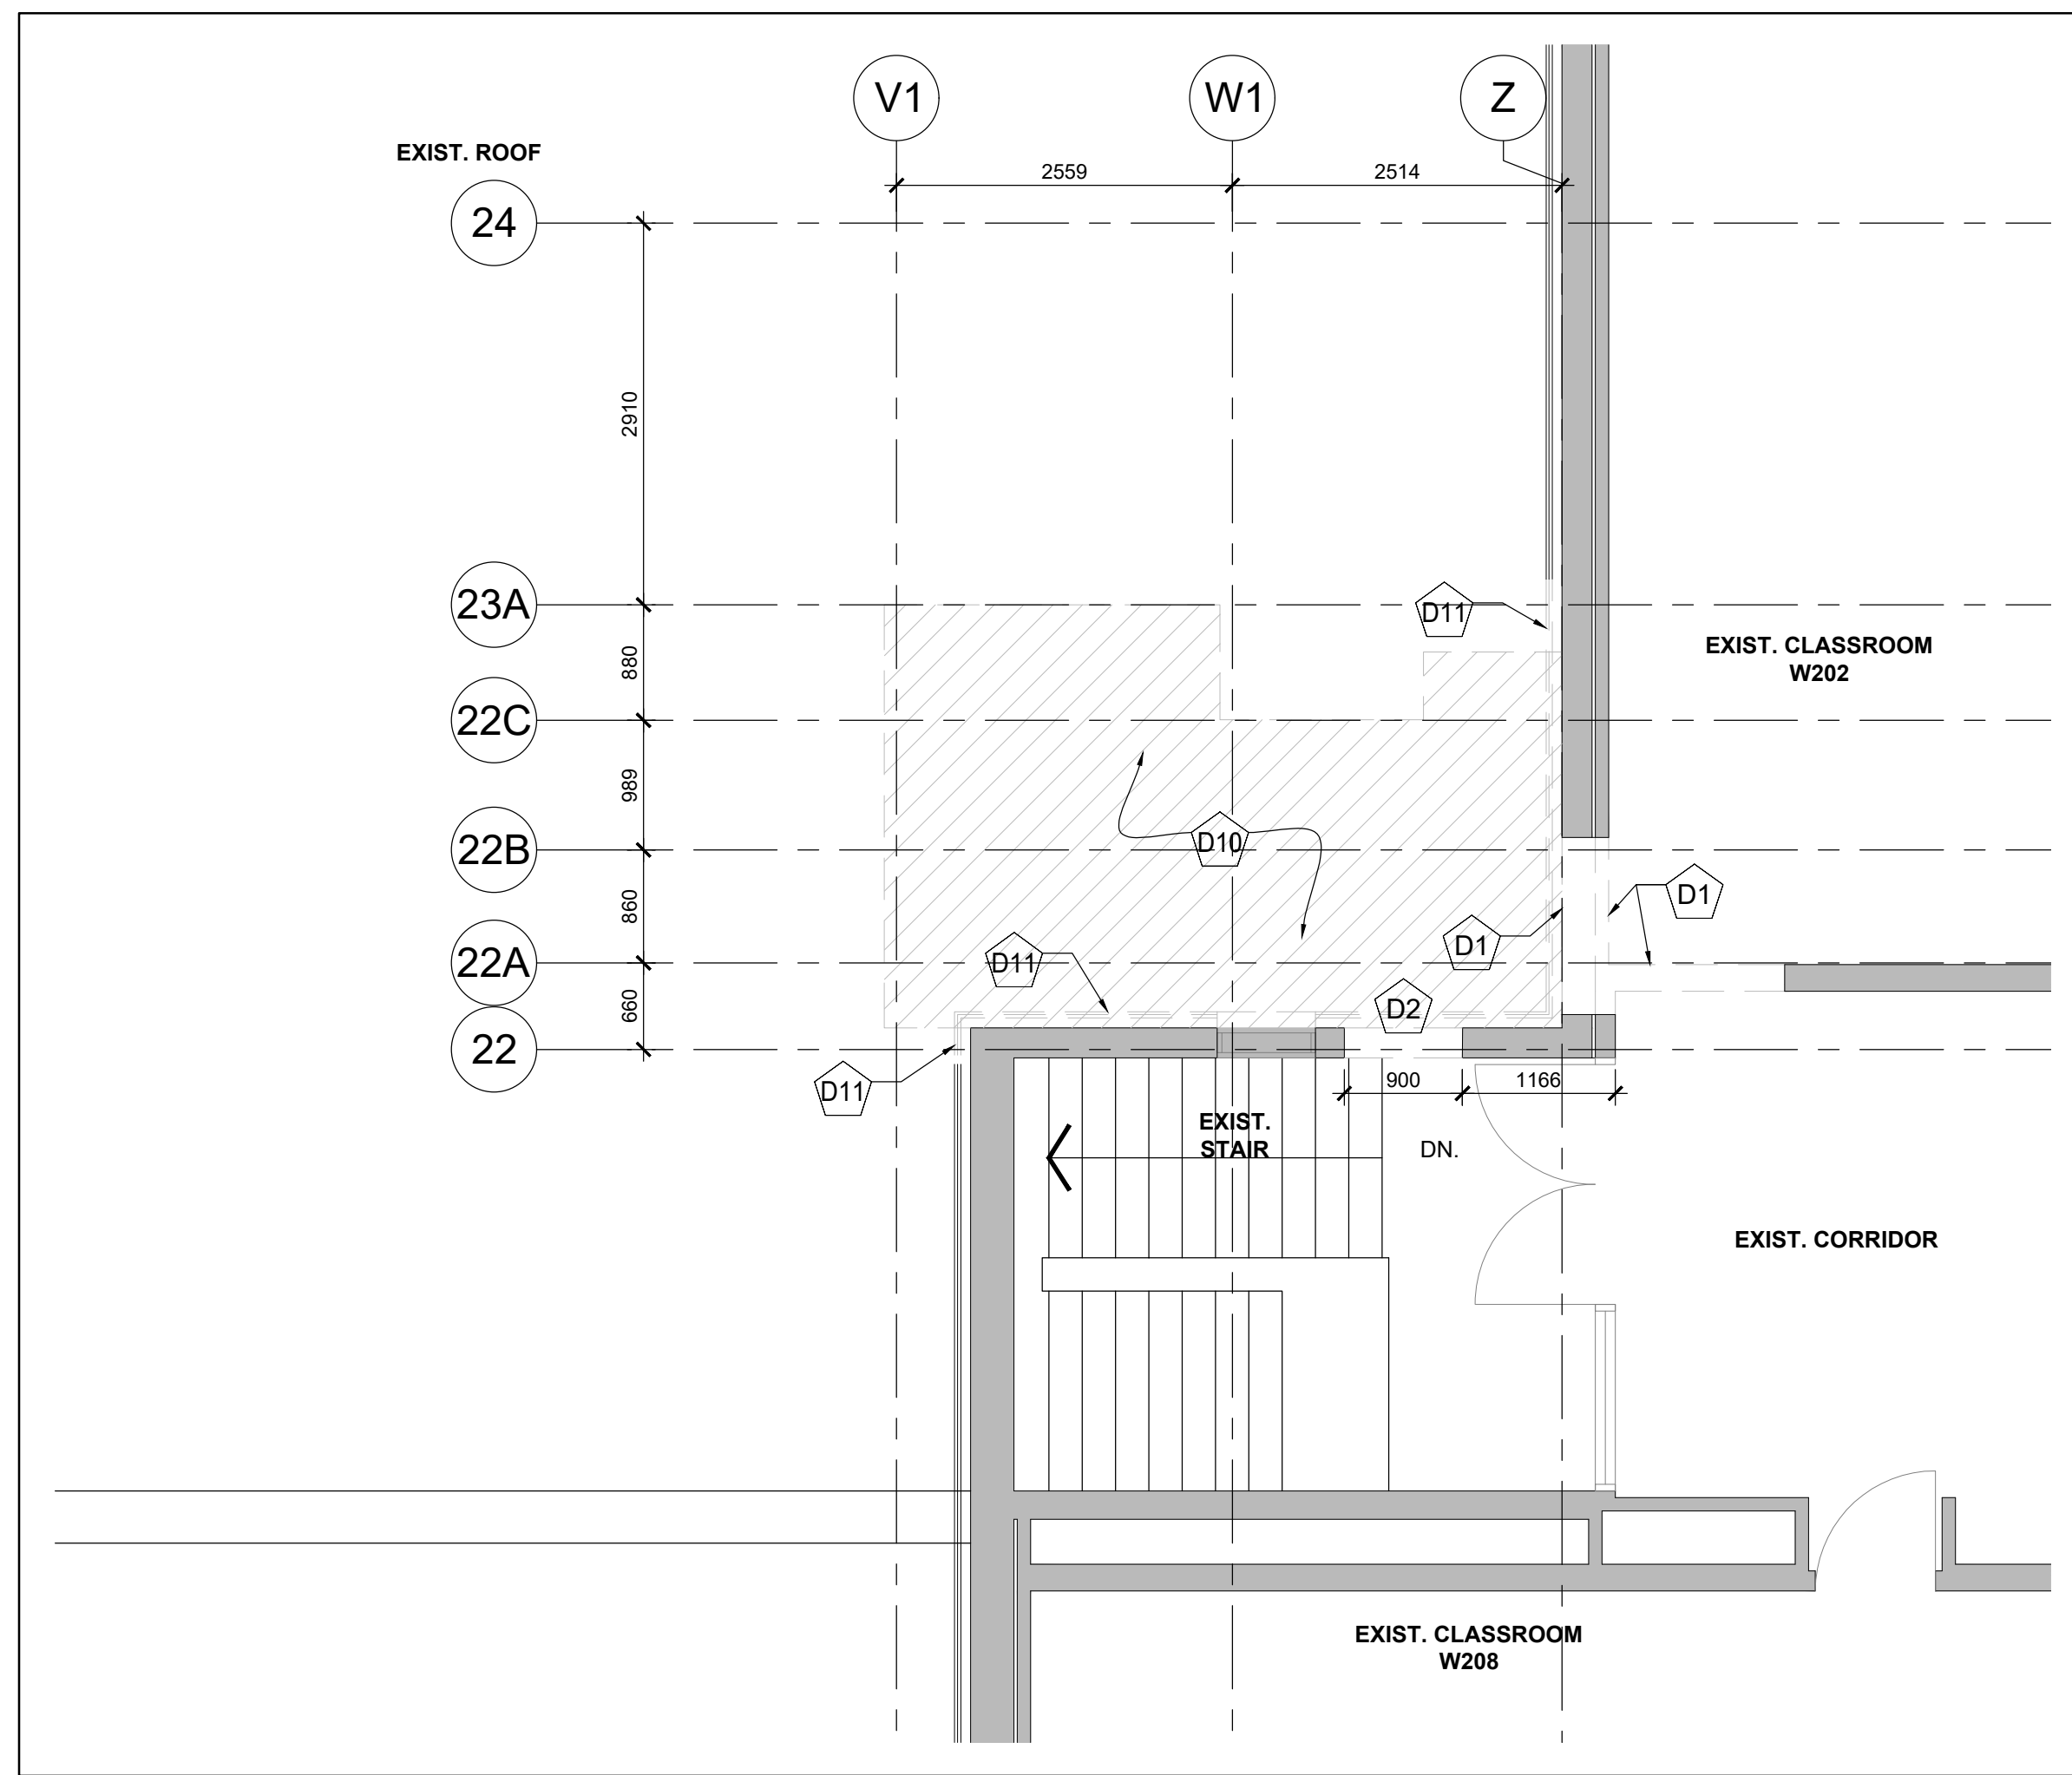


6 PARTIAL FLOOR PLAN - LEVEL 2 & ROOF
A101-D 1:50

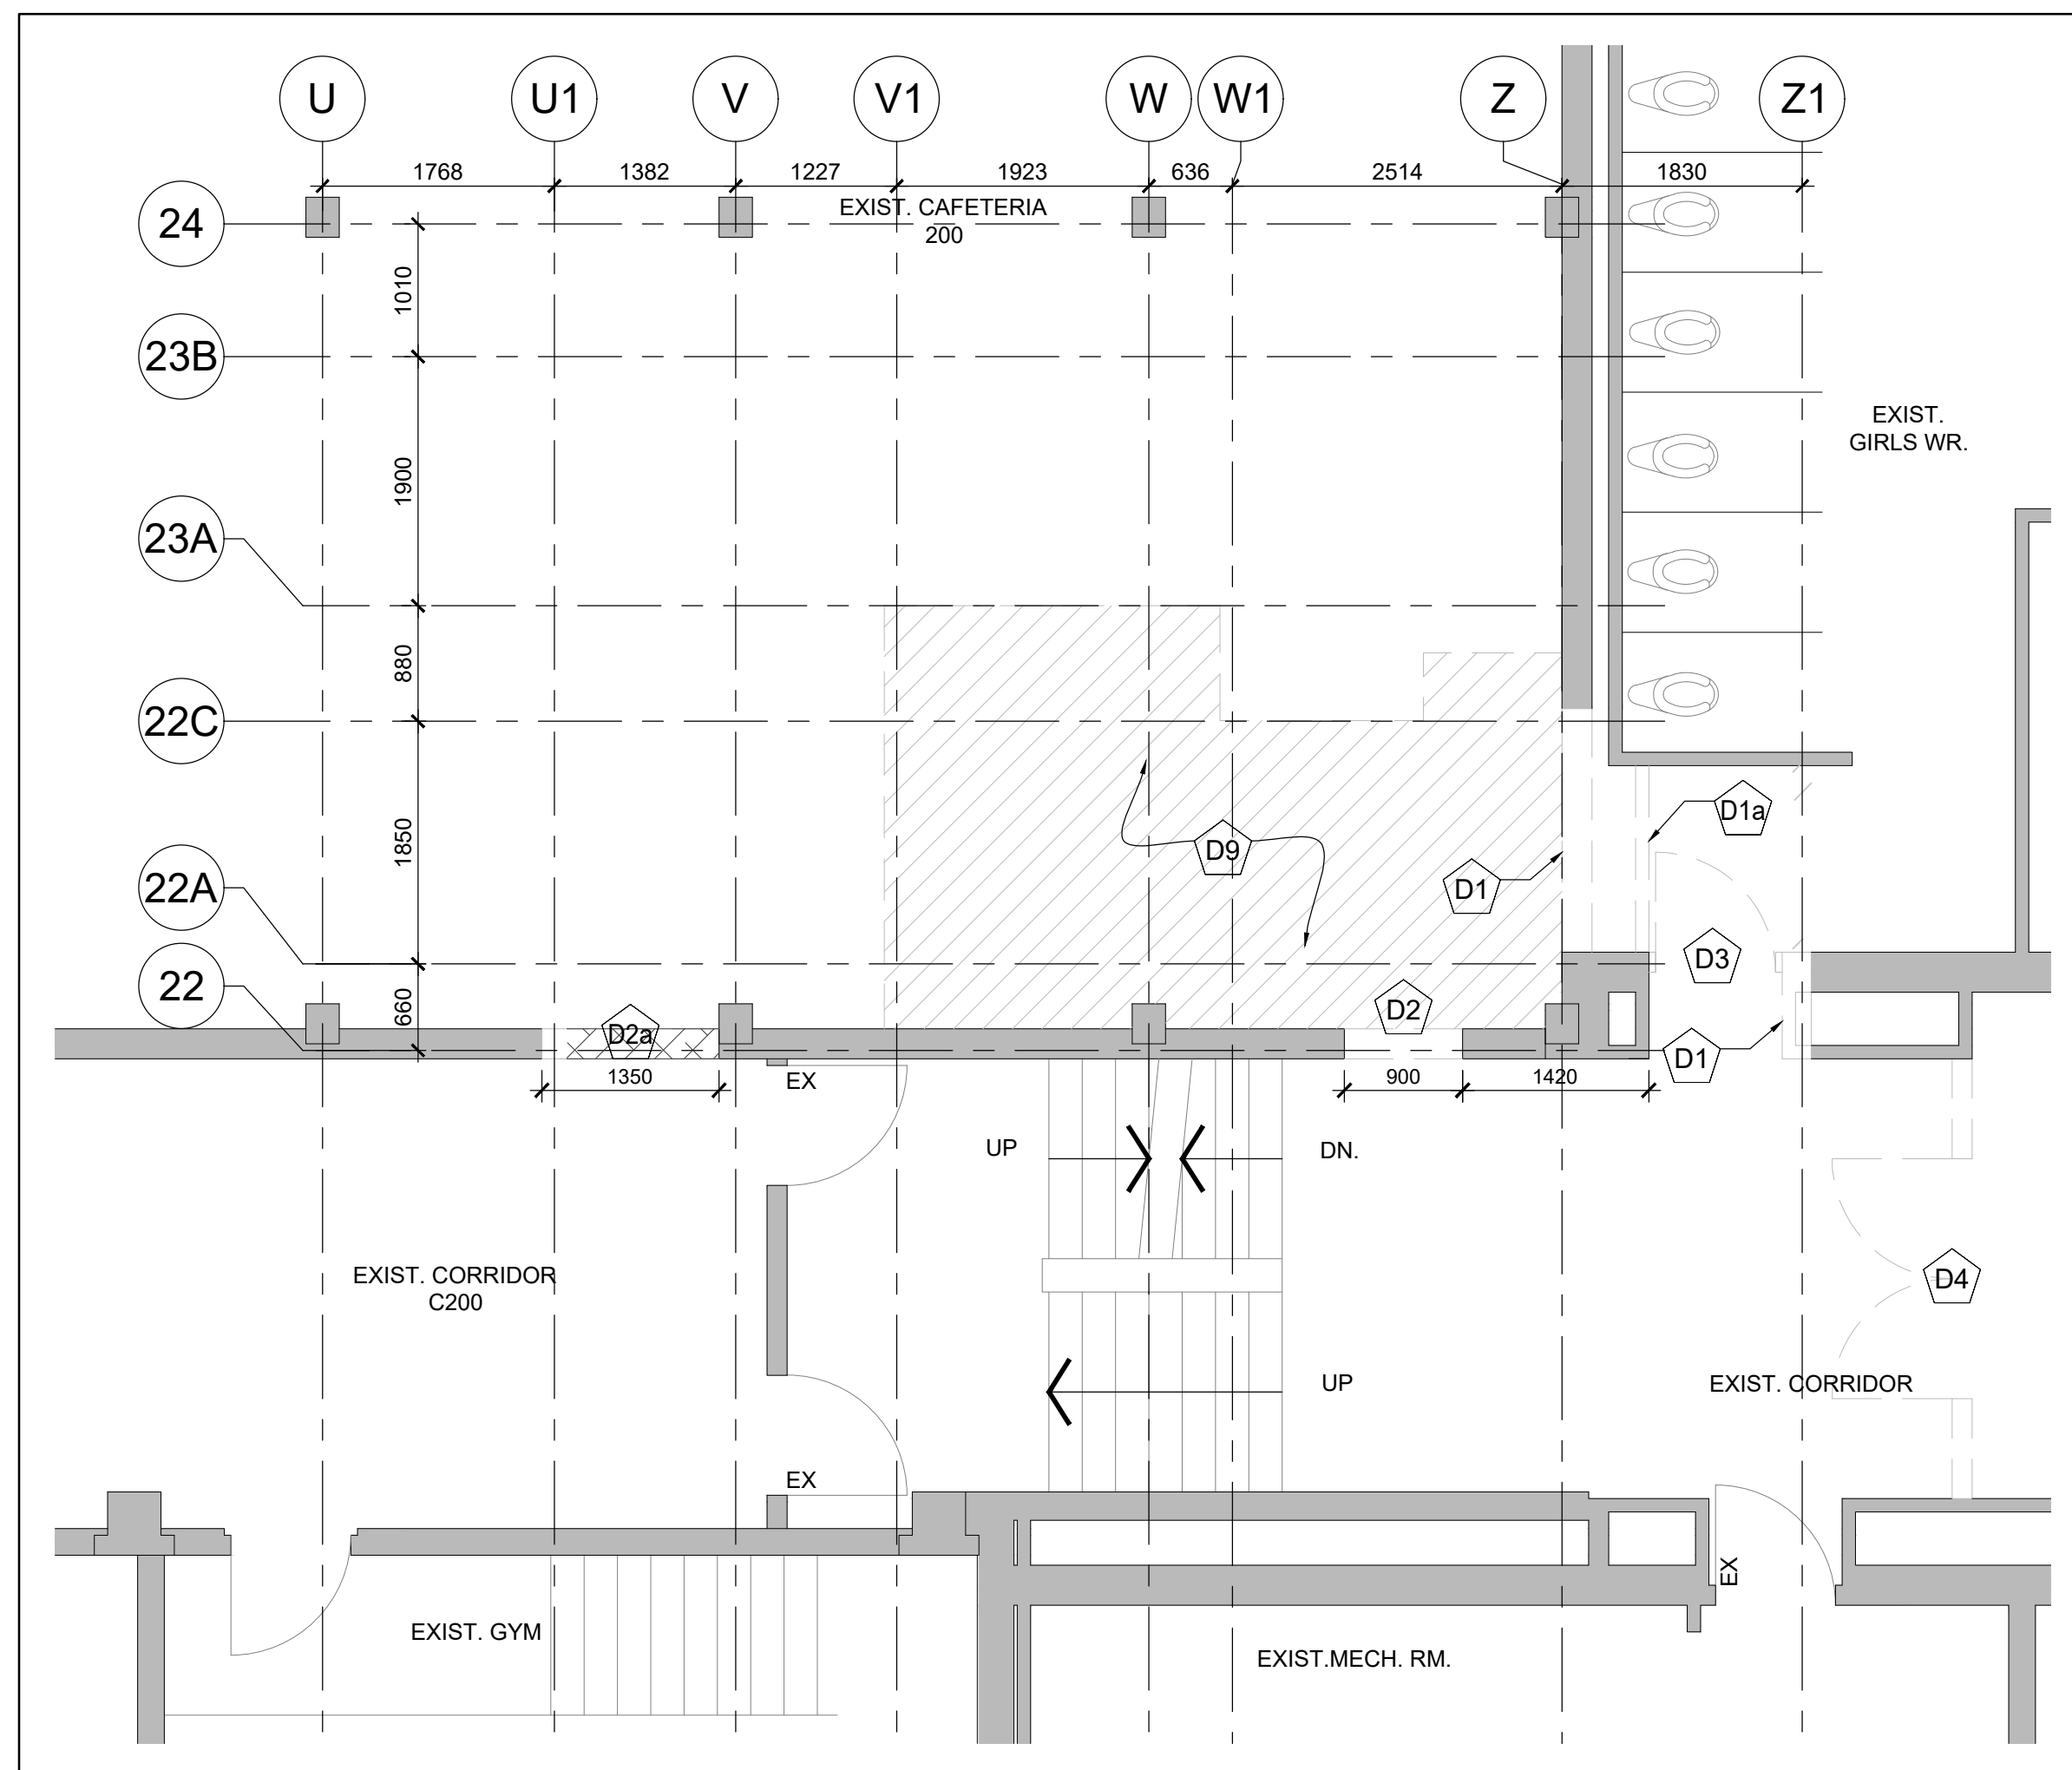

4 PARTIAL FLOOR PLAN - LEVEL 1 & 1A
A101-D 1:50

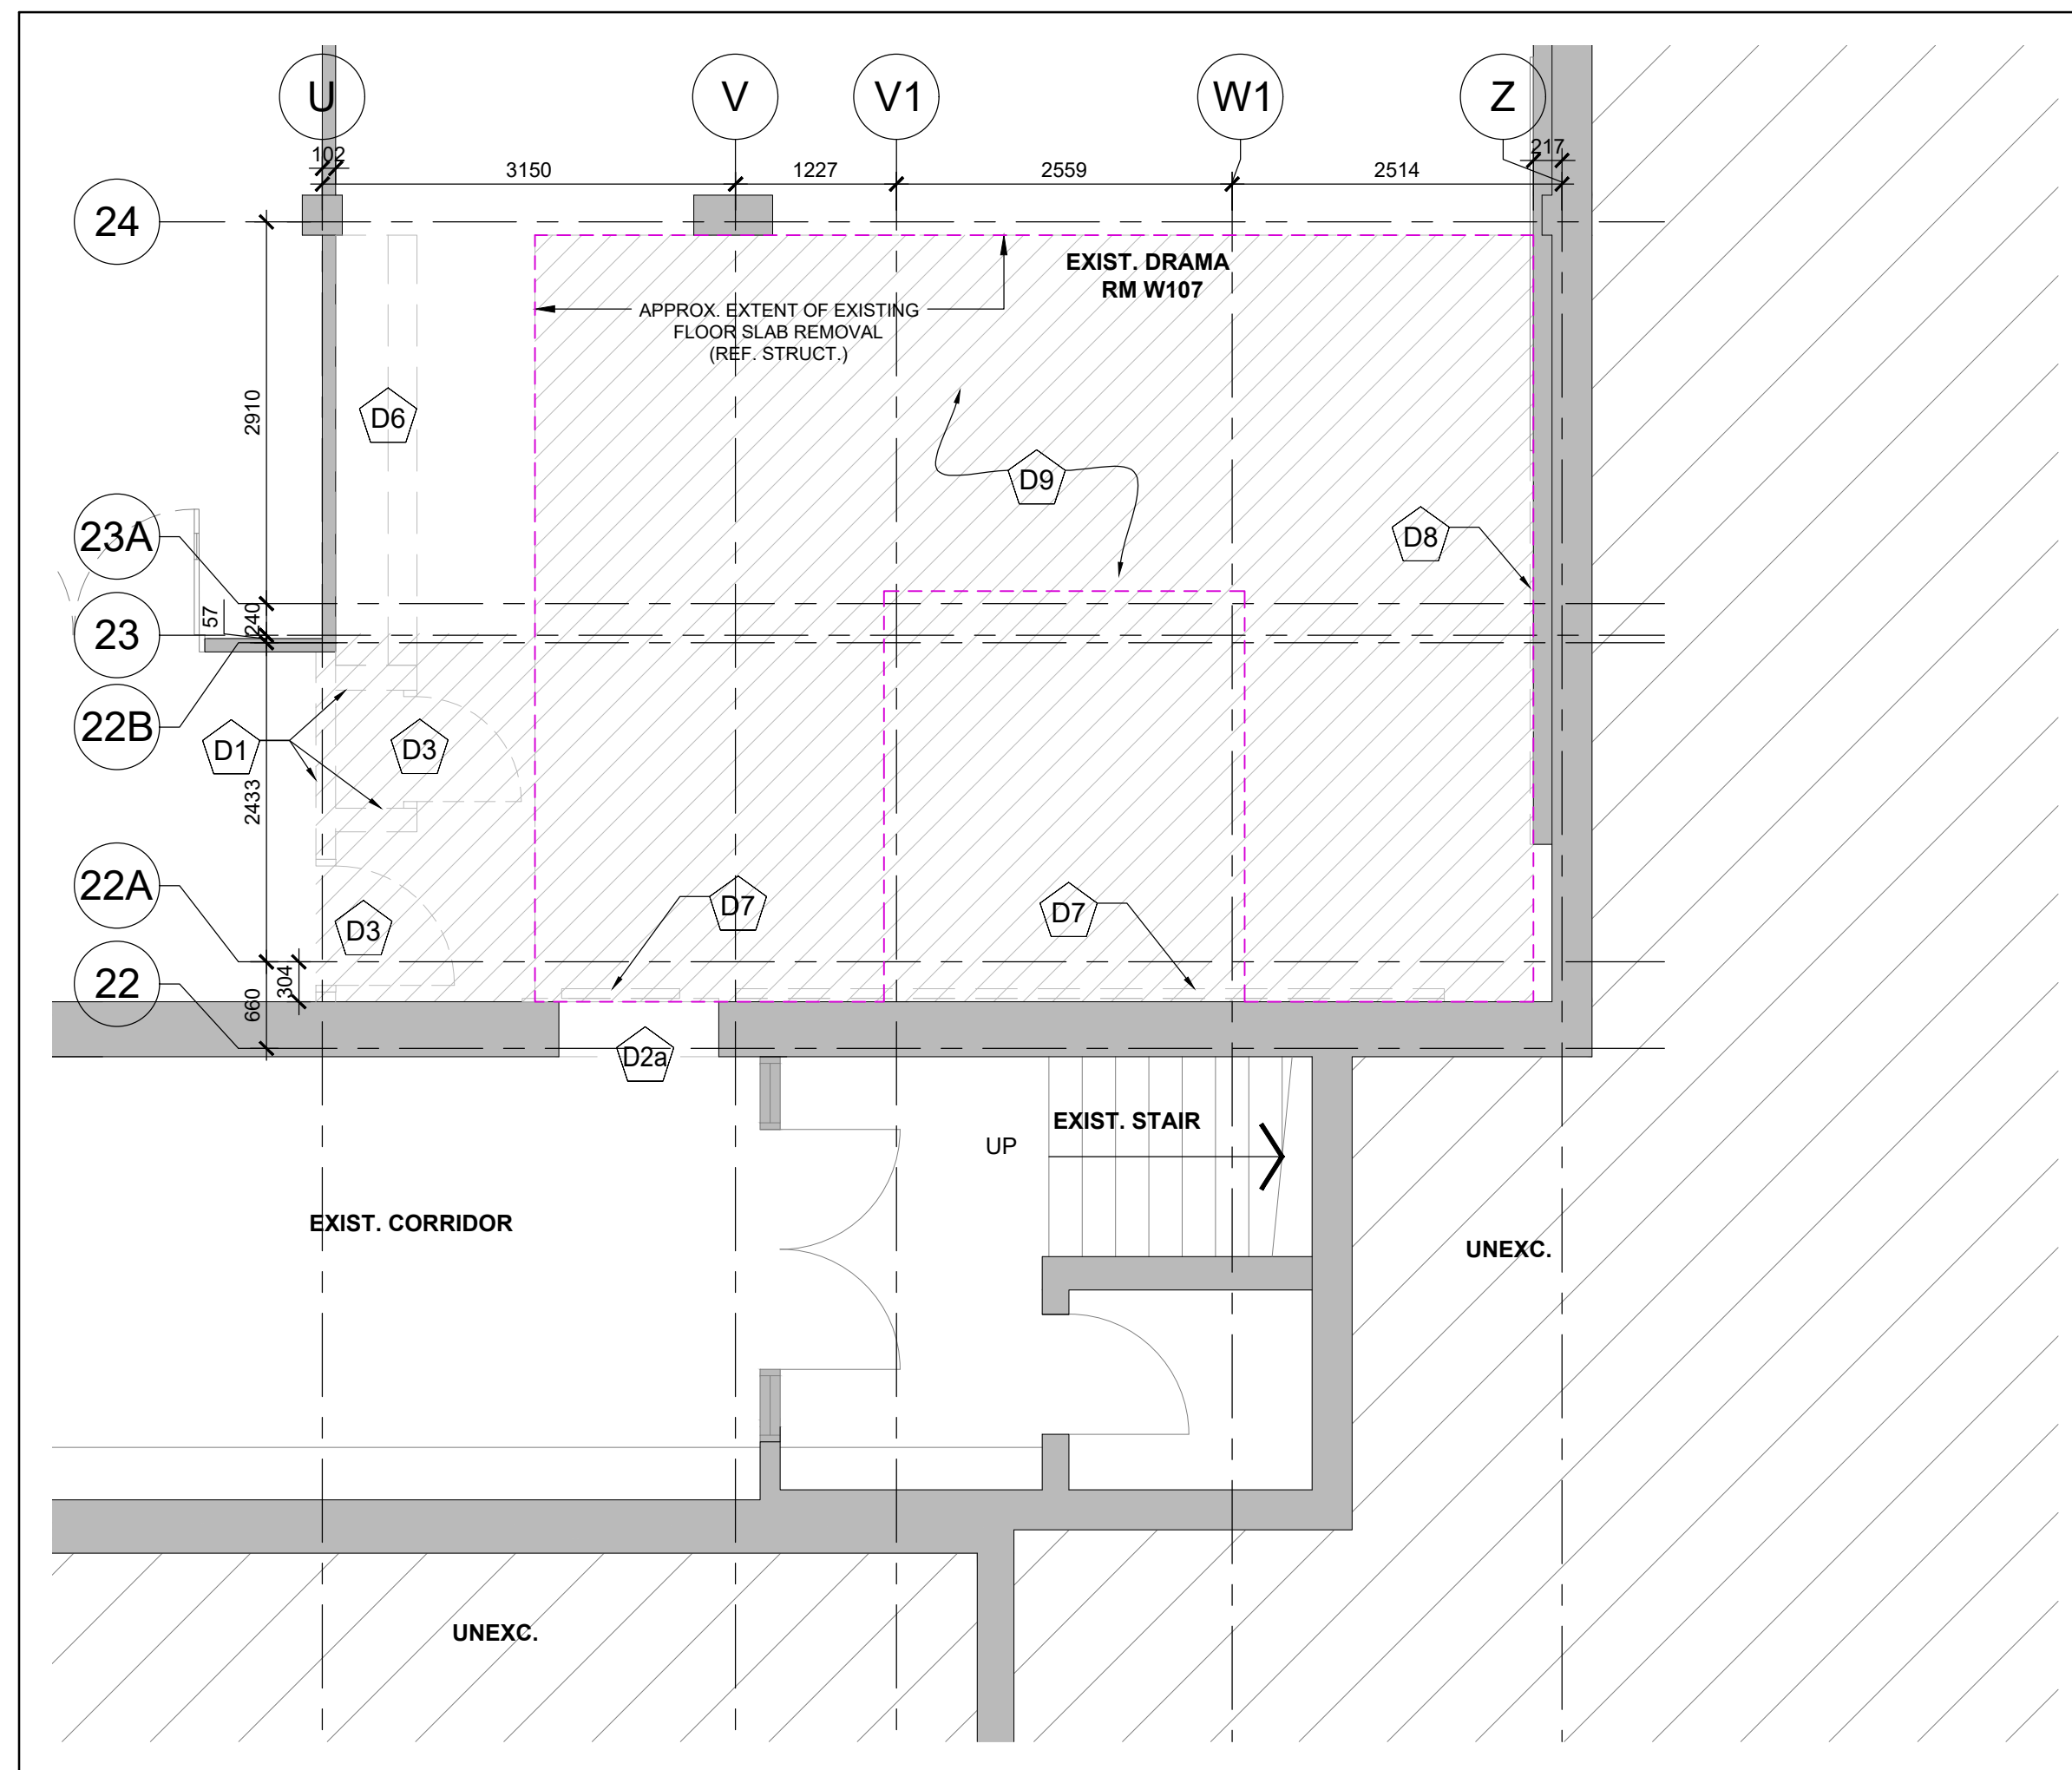

2 PARTIAL FLOOR PLAN - LEVEL 0
A101-D 1:50

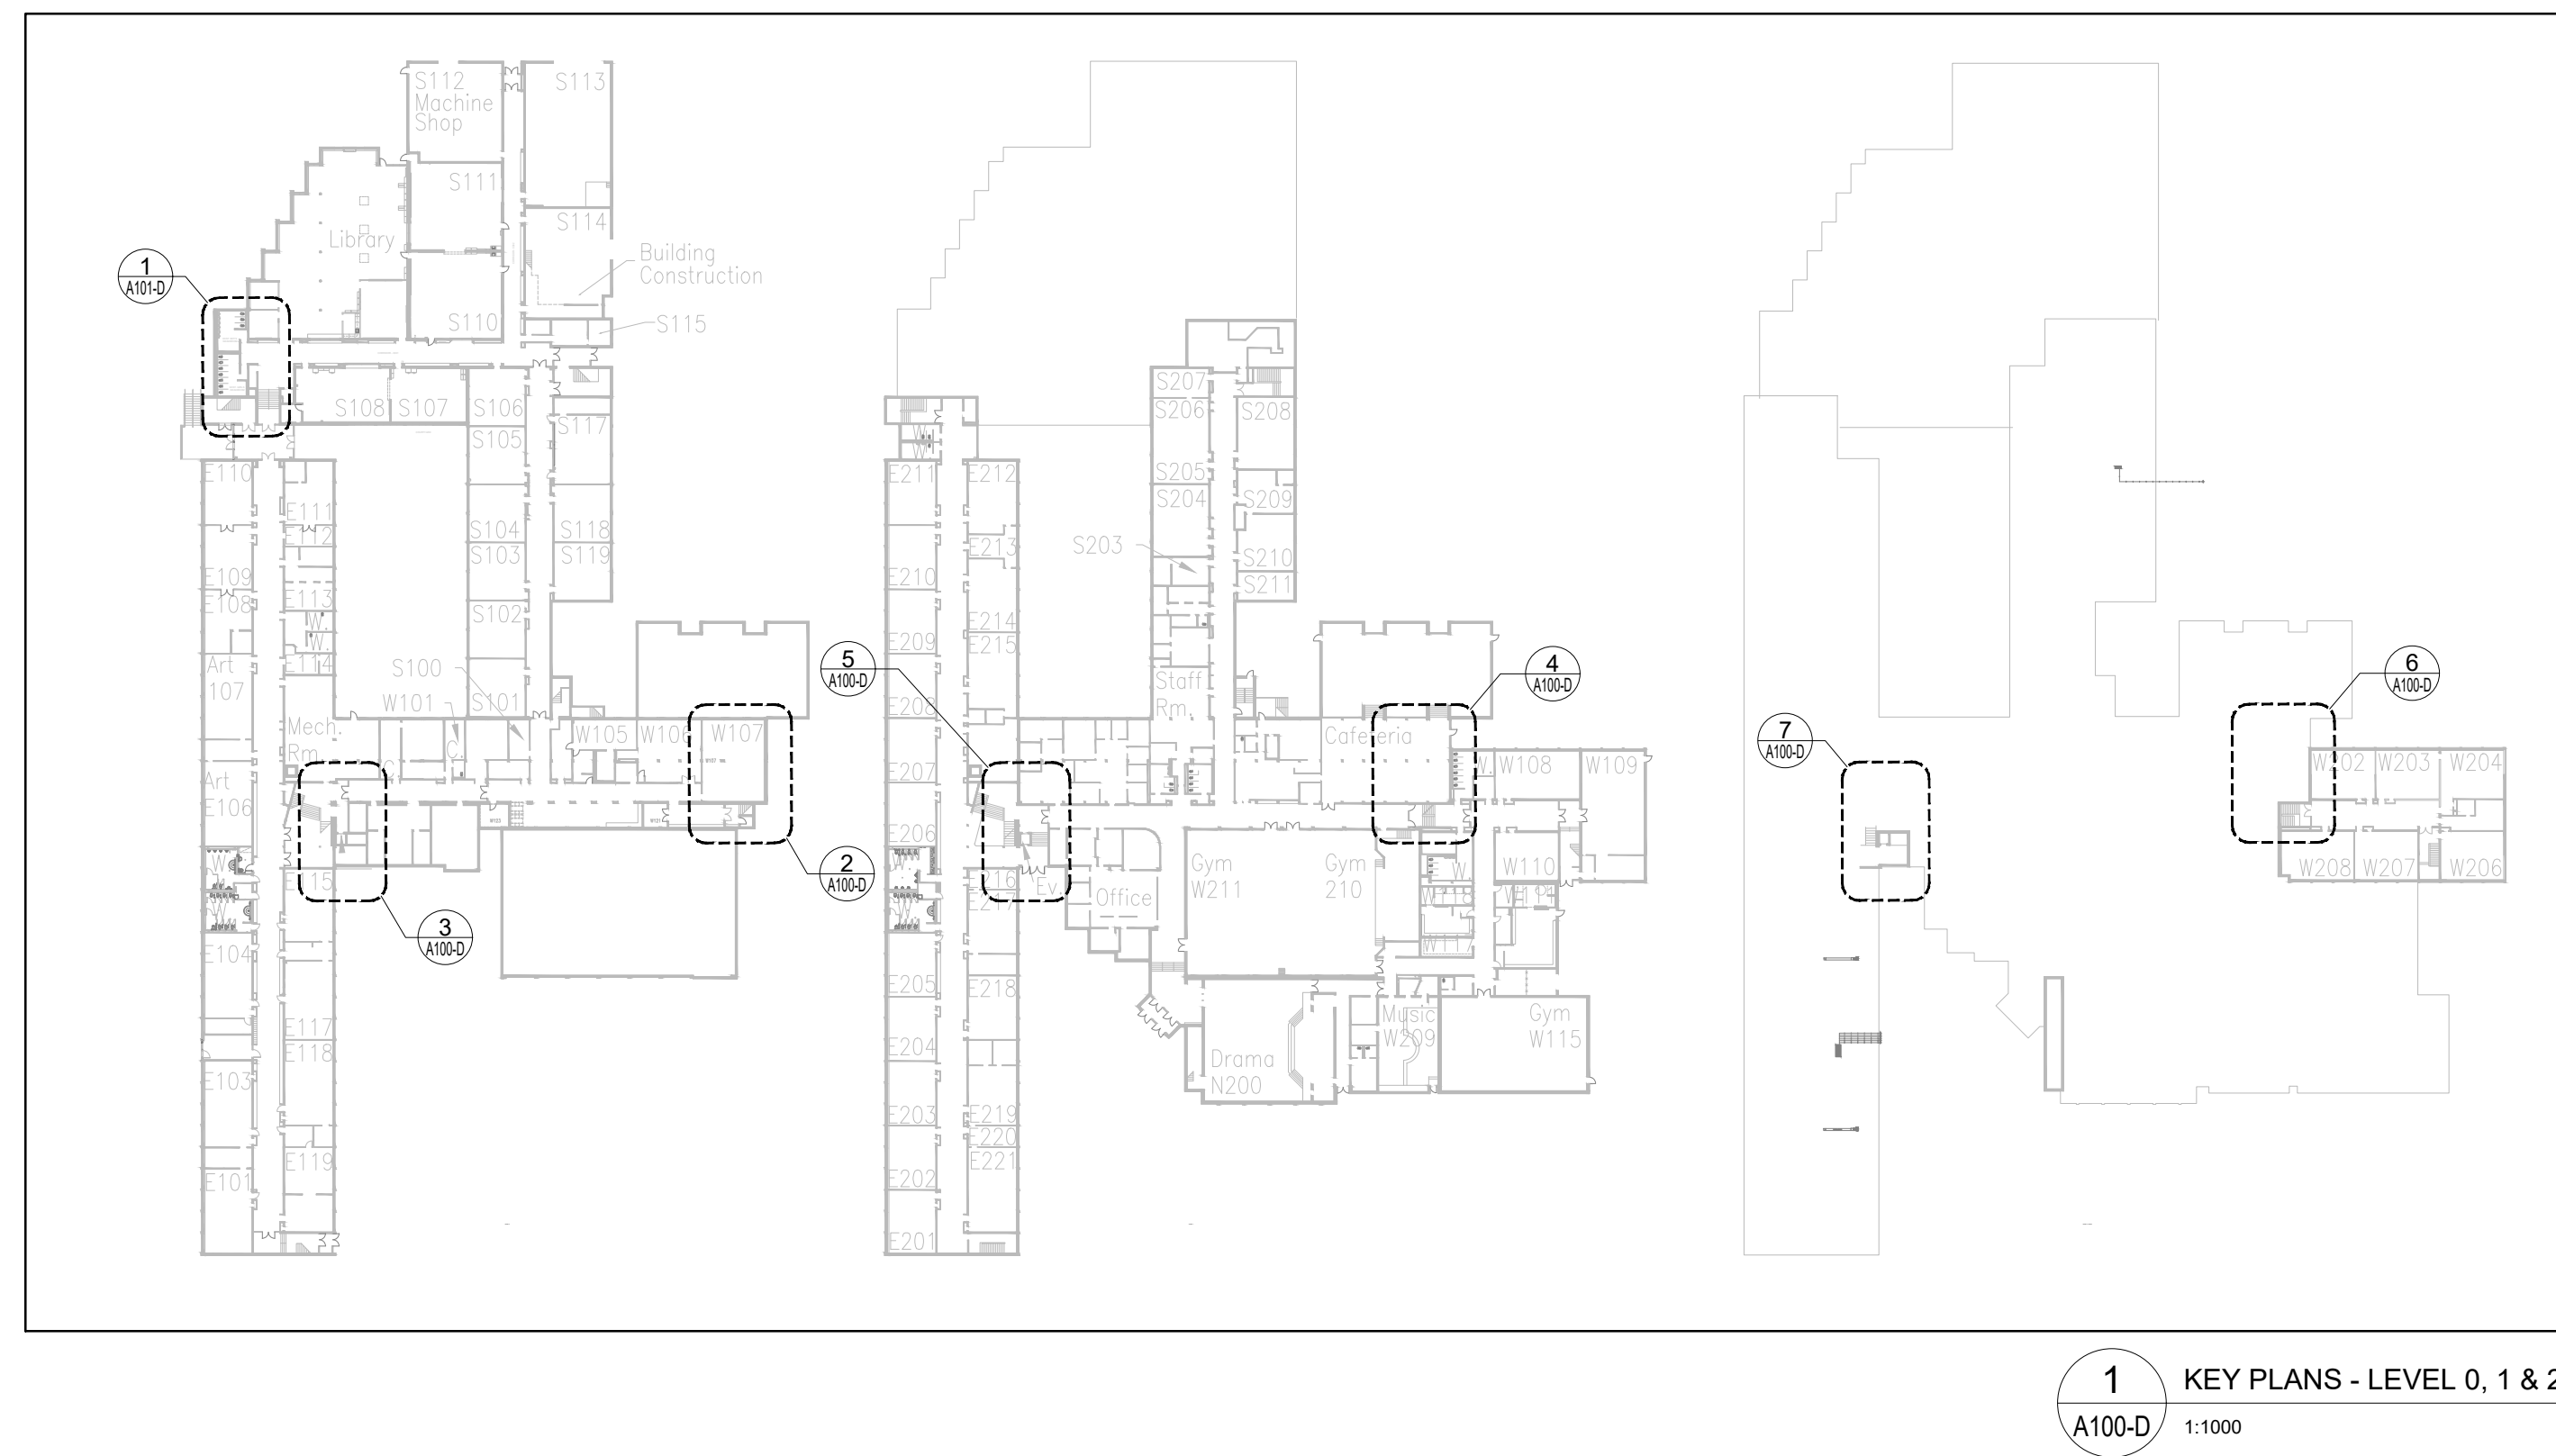

1 KEY PLANS - LEVEL 0, 1 & 2
A100-D 1:1000

ALTERATION TO EXISTING AREA LEGEND:

- EXISTING WALLS TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING SCREEN TO REMAIN
- EXISTING WALL, DOOR, OR OTHER COMPONENT (MILLWORK, PLUMBING FIXTURE, MECHANICAL & ELECTRICAL EQUIPMENT) TO BE REMOVED/DEMOLISHED
- APPROXIMATE EXTENT OF SLAB/ROOF REMOVAL - REFER TO NOTE #4, 'GENERAL DEMOLITION NOTES'
- APPROXIMATE EXTENT OF SLAB RESTORATION - REFER TO NOTE #4, 'GENERAL DEMOLITION NOTES'

GENERAL DEMOLITION NOTES:

- REFER TO SPECS & ABATEMENT REPORT REGARDING DESIGNATED SUBSTANCES REMOVAL.
- ALL DEMOLITION SCOPE SHOWN ON DESIGNATED SUBSTANCES ABATEMENT DOCUMENTS ARCH., STRUCTURAL, MECH. & ELECTRICAL DWGS IS BY SC01.
- SC01 TO PROVIDE DEMOLITION REQUIRED FOR NEW MASONRY OPENINGS OR MODIFICATIONS TO EXISTING MASONRY OPENINGS, IN LOCATIONS WHERE NEW DOORS ARE BEING PROVIDED.
- DEMOLITION SCOPE REGARDING SLAB REMOVAL AND ASSOCIATED RESTORATION: SC02 TO NEATLY SAW-CUT AND REMOVE/DISPOSE CONCRETE SLAB. SC01 TO REMOVE REQUIRED EXTENT OF FILL AND PROVIDE LEAN MIX CONCRETE WHERE REQ'D. (SEE STRUCT. DWGS). SC01 TO PROVIDE COMPACTED BACKFILL, NEW CONCRETE SLAB (AS PER STRUCT. DWG S001) AND DISPOSE OF ANY REMAINING SPOILS.
- PROTECT AND PROPERLY STORE ANY DOORS REMOVED TEMPORARILY BY CONTRACTOR TO FACILITATE CONSTRUCTION ACTIVITIES. REINSTATE AFTER CONSTRUCTION IS COMPLETED.
- ARCHITECTURAL DEMOLITION DRAWINGS MUST BE READ IN CONJUNCTION WITH STRUCTURAL, MECH. AND ELEC DEMOLITION DRAWINGS. REFER TO STRUCTURAL, MECH. & ELEC DEMOLITION DRAWINGS FOR COORDINATION.
- CONTRACTOR TO PATCH, REPAIR, AND MAKE GOOD ALL HOLES OR DAMAGE DUE TO GENERAL DEMOLITION ON EXISTING MASONRY SURFACES TO REMAIN.
- CONTRACTOR TO FILL IN AND FINISH HOLES LEFT ON THE FLOORS OR WALLS AFTER DEMOLITION TO MATCH WITH EXISTING SURROUNDING MATERIALS.
- CONTRACTOR TO ENSURE THAT THE PORTION OF THE BUILDING BEING RETAINED IS HANDED BACK TO THE OWNER (ON COMPLETION OF CONSTRUCTION) IN A CONDITION SIMILAR TO ITS EXISTING CONDITION OR BETTER. THIS REQUIREMENT INCLUDES PROVISION OF ALL NECESSARY PROTECTIVE MEASURE LIKE SECURITY, PROTECTION FROM THE ELEMENTS AND WEATHER, HEATING / DEHUMIDIFICATION AS NECESSARY, ETC.

DEMOLITION NOTES:

- D1 REMOVE AND DISPOSE EXISTING MASONRY WALL, PARTITION WALL AND/OR CHASE WALL (FULL HEIGHT) C/W ALL ASSOCIATED AND/OR ATTACHED COMPONENTS. FILL IN CONCRETE BLOCK HOLES AND/OR MASONRY ROUGH SURFACES WITH CEMENTITIOUS MATERIAL TO MAKE SMOOTH FOR RECEIVING NEW FINISH MATERIAL. REFER TO STRUCT. FOR DEMOLITION COORDINATION.
- D1a REMOVE AND DISPOSE EXISTING MASONRY WALL, PARTITION WALL AND/OR CHASE WALL (FULL HEIGHT) C/W ALL ASSOCIATED AND/OR ATTACHED COMPONENTS. CAP TERMINATED SERVICES, OR PREPARE FOR RELOCATION - REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR DETAILS. REPAIR AND MAKE GOOD ALL SURFACES. MAKE READY TO RECEIVE PROPOSED WORK.
- D2 REMOVE AND DISPOSE EXISTING MASONRY WALL FOR NEW DOOR AND/OR SCREEN OPENING. REMOVE ASSOCIATED AND/OR ATTACHED COMPONENTS. CAP TERMINATED SERVICES, OR PREPARE FOR RELOCATION - REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR DETAILS. MAKE GOOD ALL SURFACES & READY TO RECEIVE NEW WORK.
- D2a REMOVE AND DISPOSE EXISTING MASONRY WALL FOR NEW OPENING. FILL IN CONCRETE BLOCK HOLES AND/OR MASONRY ROUGH SURFACES WITH CEMENTITIOUS MATERIAL TO MAKE SMOOTH FOR RECEIVING NEW FINISH MATERIAL.
- D3 REMOVE AND DISPOSE EXISTING WINDOW & FRAME C/W ALL ASSOCIATED COMPONENTS. MAKE GOOD AFFECTED SURFACES TO RECEIVE NEW FINISH MATERIAL.
- D4 REMOVE AND DISPOSE EXISTING SCREEN C/W ALL ASSOCIATED COMPONENTS. MAKE GOOD AFFECTED SURFACES TO RECEIVE NEW FINISH MATERIAL.
- D5 REMOVE AND DISPOSE EXISTING WINDOW & FRAME C/W ALL ASSOCIATED COMPONENTS. MAKE GOOD AFFECTED SURFACES READY TO RECEIVE NEW WINDOW.
- D6 REMOVE AND DISPOSE EXISTING MILLWORK ASSEMBLY WITH SUPPORTING FRAMING, AND ALL ASSOCIATED COMPONENTS. MAKE GOOD AND PREPARE TO RECEIVE NEW FINISHES. ALLOW FOR INFILL AND REPAIR OF EXISTING, DAMAGED MASONRY WALL.
- D7 REMOVE EXISTING CHALKBOARD, MARKER BOARD, OR TACK BOARD INCLUDING ADHESIVE. MAKE GOOD (INCLUDE INFILLING OF DAMAGED BLOCK & PATCHING) & READY TO RECEIVE NEW WORK.
- D8 REMOVE EXISTING MIRROR WITH SUPPORTING BACKING, AND ALL ASSOCIATED COMPONENTS. MAKE GOOD AND PREPARE TO RECEIVE NEW PAINT. ALLOW FOR FILL IN OF DAMAGED MASONRY WALL.
- D9 CUT, REMOVE AND DISPOSE EXISTING FLOOR SLAB TO CREATE TRENCH OR NEW OPENING PER PROPOSED LAYOUT. REFER TO MECH., ELEC. & STRUC. DWGS. FOR ADDITIONAL REQUIREMENTS AND UNDERSLAB CONNECTIONS. MAKE GOOD (ALL TRADES) ALL AFFECTED SURFACES READY TO RECEIVE PROPOSED WORK/FINISH.
- D10 REMOVE AND DISPOSE EXISTING LIFT CONCRETE PAD FOOTING. REFER TO STRUC. FOR DEMOLITION COORDINATION.
- D11 CUT, REMOVE AND DISPOSE EXISTING ROOF ASSEMBLY C/W ASSOCIATED COMPONENTS, SUCH AS (BUT NOT LIMITED TO) METAL FLASHING, ROOF CARPENTRY, AND PARAPET ASSEMBLY (WHERE REQUIRED). REFER TO STRUC., MECH. & ELEC. DWGS. FOR DEMOLITION COORDINATION.
- D12 REMOVE AND DISPOSE EXISTING EXTERIOR METAL WALL PANEL C/W ASSOCIATED COMPONENTS.
- D13 REMOVE AND DISPOSE EXISTING LIFT C/W ASSOCIATED COMPONENTS, REFER TO STRUC., MECH. & ELEC. FOR DEMOLITION COORDINATION.
- D14 REMOVE AND SALVAGE EXISTING PATIO STONES AND METAL ROOF LADDER C/W ASSOCIATED COMPONENTS. TO BE RELOCATED AT PROPOSED NEW LOCATION. FILL IN ANY HOLES IN EXISTING EXTERIOR WALLS OR ROOF FROM REMOVAL OF LADDER.

Client
Halton District School Board
2050 Guelph Line
Burlington, Ontario

T. A. BLAKELOCK H.S.
RENOVATIONS

1160 Rebecca Street
Oakville, ON

Architect

snyder

Snyder Architects Inc.
100 Broadview Ave., Suite 201, Toronto, ON, M4M 3H3
Tel: 416-595-3444 Fax: 416-595-4443
www.snyderarchitects.ca

Consultants

Structural Consultants
Kalos Engineering Inc.
300 York Boulevard
Hamilton, Ontario, L8R 3K6
Tel: 905-333-9119

Mechanical and Electrical Consultants
EXP
1286 S. Service Rd.
Stoney Creek, Ontario, L8E 5R9
Tel: 905-525-6069



Project North True North

No.	Revisions	Date
3	ISSUED FOR TENDER	2025 04 17
2	ISSUED FOR PERMIT	2025 04 08
1	ISSUED FOR REVIEW	2025 02 12
No.	Issue	Date

Approved: Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawing. Drawings shall not be used for construction purposes until issued by the Architect for construction.



Drawing Title:
KEY PLAN
FLOOR PLANS
ELEVATORS - DEMO

Scale: AS NOTED Date: 2025 02 06

Drawn by: Checked by:

Job No. Drawing No.

2215-C A100-D

ACT	• ACOUSTIC CEILING TILE
AFF	• ABOVE FINISH FLOOR
CAF	• CAFETERIA
CET	• CERAMIC TILE
CNU	• CONCRETE MASONRY UNIT
CNT	• CONTINUOUS
CONR	• CORRIDOR
C/S	• SEALED CONCRETE
C/W	• COMPLETE WITH
E.J.	• EXPANSION JOINT
ELEV	• ELEVATOR
EXIST/EXIST	• EXISTING
EXP	• EXPOSED
EXT	• EXTERIOR
FR	• FLOOR DRAIN, SEE MECH. DWGS
FDR	• FIRE RESISTANT RATING
FS	• FURSHIM BOARD
GB-AR	• ARASE RESISTANT GYPSUM BOARD
GB-FR	• FIRE RATED GYPSUM BOARD
H	• HOLLOW METAL
PF	• PORCELAIN FLOOR TILE
PMO	• POWER DROD OPERATOR
RD	• ROOF DRAIN
R.O.	• ROUGH OPENING
SIM	• SIMILAR
T/O	• TOP OF
UNO	• UNNOTED NOTED OTHERWISE
UNEXC.	• UNEXCAVATED
US	• UNDERSIDE
VEST.	• VESTIBULE
W	• WITH

(EW1)	METAL WALL PANEL (MWP) on 25mm Z-GUT on 75mm THERMAL SPACERS W/ 75mm SPRAY FOAM INSUL. (INS-FIP-1)
(PW1)	90mm CONCRETE MASONRY UNIT WALL
(PW2)	140mm CONCRETE MASONRY UNIT WALL
(PW3)	190mm CONCRETE MASONRY UNIT WALL
(PW4)	290mm CONCRETE MASONRY UNIT WALL
(PW5)	13mm GSB (EXTERIOR SIDE) 1/2" METAL STUDS @400mm O.C. W/ 100mm INS-BB-1 13mm GBLWT-1
(PW6)	2 LAYERS OF 16mm TYPE "X" GB (GB-AR) 92mm METAL STUDS @400mm O.C. W/ 88mm INS-BB-1

	EXISTING WALLS TO REMAIN
	NEW MASONRY WALL
	NEW STUD PARTITION
	EXISTING AREA NOT INCLUDED IN THE SCOPE OF RENOVATION WORK
	EXISTING DOOR TO REMAIN
	NEW DOOR AND FRAME - REFER TO DOOR SCHEDULE

RI BUILT-UP BITUMINOUS ROOFING (SECTION 07 51 00)
GRAVEL SURFACE FINISH (HOT APPLIED FLOOD COAT)
4-PLY TYPE IV FELT WITH 1-PLY COMPOSITE FELT WITH
HOT APPLIED INTER-PLY ADHESIVE
13mm COVER BOARD
TAPERED INSULATION (INS-RB-3) WHERE REQUIRED
100mm / 2 LAYERS (MIN.) ROOF INSULATION (INS-RB-3)
VAPOUR RETARDER
13mm UNDERLAY BOARD
METAL DECK
STEEL ROOF STRUCTURE - SLOPE ACCORDING TO ROOF PLAN

F1	FLOOR TYPE 1 FLOOR FINISH AS PER ROOM FINISH SCHEDULE CONCRETE SLAB - THICKNESS AS PER STRUCTURAL BELOW-SLAB VAPOUR RETARDER AGGREGATE BASE COURSE
F2	FLOOR TYPE 2 (1 HR FIRE RATED) FLOOR FINISH AS PER ROOM FINISH SCHEDULE CONCRETE ON STEEL DECK ON STEEL FRAME

FIRE PROTECTION SCHEDULE				
	CONDITION	FRR REQ'D	FIRE PROTECTION	
BEAM/ LINTEL	LINTEL ~2m @ LOAD BEARING WALL	1 HR	CMU (TYP.) @ DBC SB-2.1.1; or SPRAY FIREPROOFING UL® #906 or PROVIDE INTUMESCENT COATING* or GYPSUM BOARD ASSEMBLY, UL® #5053	
	LINTEL ~3m @ NON-LOAD BEARING WALL	1 HR		
	IN 1HR FIRE SEPARATION	1 HR		
	SUPPORTING FLOOR	1 HR		
FLOOR	ALL FLOOR ASSEMBLIES	1 HR	POUR IN PLACE CONCRETE, DBC SB-2.2.1 FLOOR TYPE F2 - COMPOSITE FLOOR, UL® #906	
WALL	FIRE SEPARATIONS AS SHOWN ON DRAWING	1 HR	CMU (TYP.) @ DBC SB-2.1.1; or GYPSUM BOARD ASSEMBLY, UL® #N407	
FIRE PROOFING NOTES:				
1. PROVIDE FRESTOP® & SEAL AT ALL SLAB EDGES.				
2. PROVIDE FRESTOP® & SEAL AT ALL STRUCTURAL MEMBER THAT PENETRATE FIRE SEPARATIONS.				
3. PROVIDE FRESTOP® & SEAL AT ALL FIRE SEPARATIONS THAT TERMINATES @ EXTERIOR WALLS.				
4. FINISHES REQUIRED RATING WITH CMU, GRout, SOLID WHERE NECESSARY.				
5. SEAL TOP OF FIRE SEPARATION WITH FIRE STOPPING.				
6. PRIME ROOF BEAMS, ALL LINTEL & EXPOSED BEAMS.				
7. CONTINUE TO PROVIDE APPROPRIATE CMU TYPE TO ACHIEVE REQUIRED FIRE RATING AT SPECIFIED THICKNESS.				
* INTUMESCENT COATING SYSTEM TO YIELD FRR AS NOTED IN SCHEDULE ABOVE. REFER TO SPEC SECTION 09 96 46 FOR DETAILS.				

1. IN AREAS WITH EXPOSED STRUCTURE, DUCTS / PIPES AND CONDUITS SHALL BE MOUNTED TIGHT TO TOP OF SLAB OR DECK, ROUTED PARALLEL, AND PERPENDICULAR TO WALLS.
2. PAINT ALL NEW EXPOSED STRUCTURE, DUCTS, PIPES, CONDUITS.
3. PAINT ALL NEW GYPSUM BOARD, AND ALL NEW CONCRETE BLOCK SURFACES TO MATCH ADJACENT EXISTING WALLS.
4. AT LOCATIONS OF ANY ARCHITECTURAL, MECHANICAL & ELECTRICAL PENETRATIONS THROUGH EXISTING WALL, RELOCATION, INLET WALL, OR CEILING OPENINGS WITH MASONRY & MORTAR (OR GYPSUM ASSEMBLY), FINISH TO MATCH EXISTING ADJACENT WALLS.
5. PROVIDE LATELS AT OPENINGS FOR NEW DUCTS IN EXIST AND EXISTING WALLS, WHERE REQUIRED, REFER TO MECH. AND STRUCT. DWGS.
6. ALL INTERIOR PARTITION WALLS TO BE EXTENDED UP TO OVERSIDE OF ROOF DECK ABOVE UNLESS NOTED OTHERWISE. NO LONG BEARING WALLS TO STOP 25mm below the UNDERSIDE OF UNDERSIDE OF ROOF DECK. PROVIDE 100mm x 100mm x 10mm S&P LATH AT TOP OF LISTED FIRE STOP & SMOKE SEAL @ US OF ROOF DECK AND PENETRATIONS PERMITTER REQUIRED AT ALL RATED WALLS.

REFER TO A001 FOR INDICATION OF FIRE SEPARATIONS ON FLOOR PLANS

1. FIRE STOP AT ALL CORRIDOR PENETRATIONS NEW AND EXISTING. MAINTAIN EXISTING FIRE SEPARATIONS. ASSUME EXISTING CORRIDOR WALLS ARE 1-HOUR RATED. PROVIDE FLANGES ON DUCT PENETRATIONS AND FIRE DAMPERS AT CORRIDOR WALL FOR NEW DUCTS.
2. PROVIDE FIRESTOP & SEAL AT ALL FIRE SEPARATIONS TO MATCH RATING OF ADJACENT WALLS.
3. ENSURE REQUIRED RATING WITH CMU, GROUT SEAL WHERE NECESSARY.
4. SEAL TOP OF FIRE SEPARATION WITH FIRE STOPPING ULC RATED ASSEMBLY OR SAME RATING AS THE FIRE SEPARATION.
5. SPRAY ALL NEW BEAMS, COLUMNS SUPPORTING FLOOR SLABS WITH 1 HOUR FIRE SPRAY FIREPROOFING COAT WHERE INTUMESCENT PART IS SPECIFIED (ALL EXPOSED STRUCTURAL STEEL ELEMENTS).
6. PRIME ALL LINTELS - REFER TO STRUCT. DWGS AND SPEC.
7. PROVIDE FIRE PROOFING PRODUCTS LISTED IN THE SPECIFICATIONS, NOTED, OR APPROVED EQUIVALENT.

1. TRANSITION STRIP IN EVERY CHANGE OF MATERIAL.
2. ALL TRANSITIONS BETWEEN DIFFERING MATERIALS TO BE FLUSH.
3. ALL FLOOR FINISH TRANSITIONS TO MEET UNDER DOOR (WHERE DOOR OCCURS).
4. ALL TERRAZZO IN-FILLS TO EXTEND TO NEXT METAL STRIP
5. CONTROL JOINT IN TILING SYSTEM EVERY 10 METERS.
6. ALL EXISTING BASE TO BE REMOVED PRIOR TO NEW BASE INSTALLATION.



General Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawings. Drawings shall not be used for construction purposes until issued by the Architect for construction.




Scale:	AS NOTED	Date:	2025 02 06
--------	----------	-------	------------

Drawn by:	Checked by:
-----------	-------------

Job No.	Project No.
---------	-------------








- | | |
|-----|---|
| D1 | REMOVE AND DISPOSE EXISTING MASONRY WALL, PARTITION WALL AND/OR CHASE WALL (FULL HEIGHT) GAO ASSOCIATED AND/OR ATTACHED COMPONENTS. CAP ALL FINISH SERVICES, OR PREPARE FOR RELOCATION - REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR DETAILS. REPAIR AND MAKE GOOD ALL SURFACES. MAKE READY TO RECEIVE PROPOSED WORK. |
| D1a | REMOVE AND DISPOSE EXISTING LOAD BEARING MASONRY WALL ENTIRELY. PROVIDE TEMPORARY SHORING - REFER TO STRUCTURAL DRAWINGS. |
| D2 | REMOVE AND DISPOSE EXISTING DOOR AND FRAME/SCREEN GAO ALL ASSOCIATED COMPONENTS AND/OR ATTACHED COMPONENTS. MAKE GOOD AND READY TO RECEIVE PROPOSED WORK. |
| D3 | REMOVE EXISTING TOILET PARTITION & TOILET PARTITION DOORS WITH ALL ASSOCIATED COMPONENTS. MAKE GOOD REMAINING SURFACES (INCLUDING FILLS IN & PATCHING OF DAMAGED WALL & SLAB) & PREPARE SUBSTRATE READY TO RECEIVE NEW WORK. |
| D4 | REMOVE AND DISPOSE ALL EXISTING PLUMBING FIXTURES AND FITTINGS (REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR MORE DETAILS). MAKE GOOD & READY TO RECEIVE NEW WORK. |
| D5 | REMOVE EXISTING PLASTER CEILING WITH BULKHEADS AND ALL ASSOCIATED COMPONENTS (REFER TO MECH. & E. DWGS). MAKE GOOD & PREPARE THE AREA FOR NEW WORK. |
| D6 | REMOVE EXISTING MIRROR WITH SUPPORTING BACKING. |
| D7 | REMOVE EXISTING RADIATOR - REFER TO MECHANICAL DWGS FOR MORE INFORMATION. |
| D8 | REMOVE EXISTING TERRAZZO FLOORING, INCLUDING COVE BASE, AND PREPARE THE SURFACE TO RECEIVE NEW CONC. TOPPING. |
| D9 | REMOVE EXISTING TERRAZZO FLOORING, SLAB & SUB-GRADE FOR NEW SANITARY CONNECTIONS - REFER TO MECH. DWGS. REPAIR THE SLAB AFTER COMPLETION OF WORK & PREPARE THE SURFACE TO RECEIVE NEW FLOOR FINISH. |


1. REFER TO SPECS & ABATEMENT REPORT REGARDING DESIGNATED SUBSTANCES REMOVAL.

[illegible]


General Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawings. Drawings shall not be used for construction purposes until issued by the Architect for construction.




Job No. **0015 C** Drawing No. **A101 B**

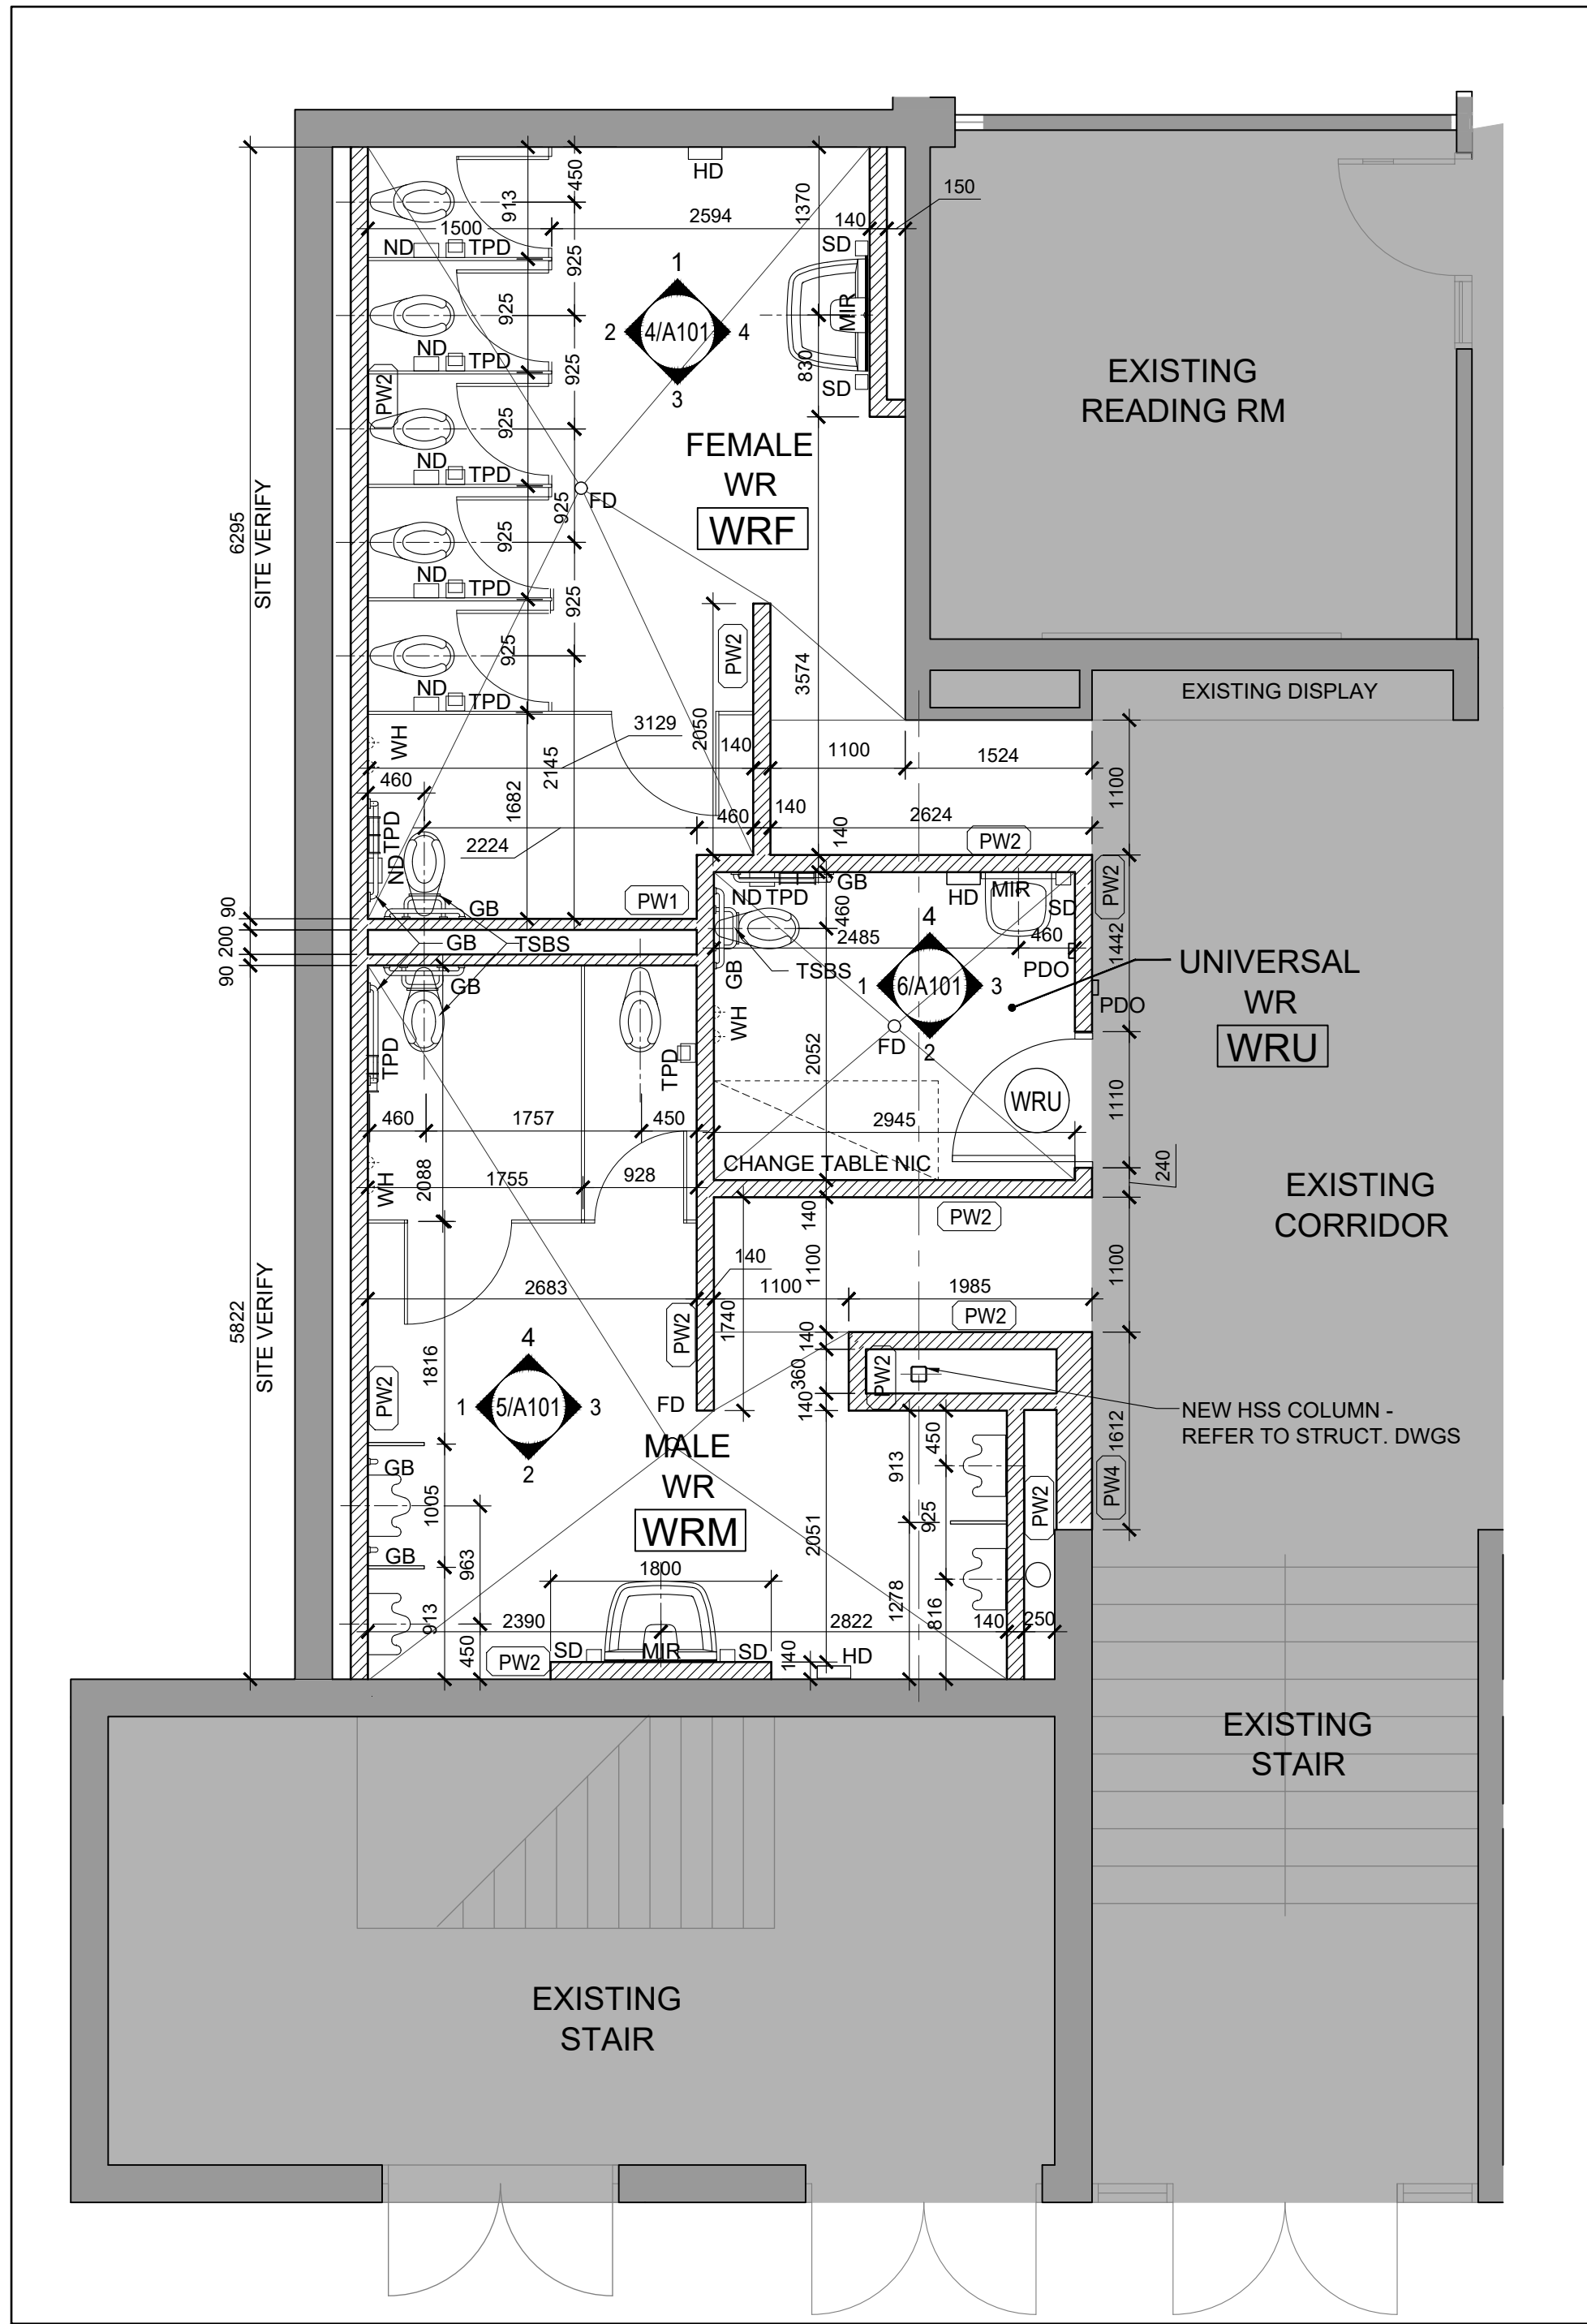


1 FLOOR PLAN
A101 1:50

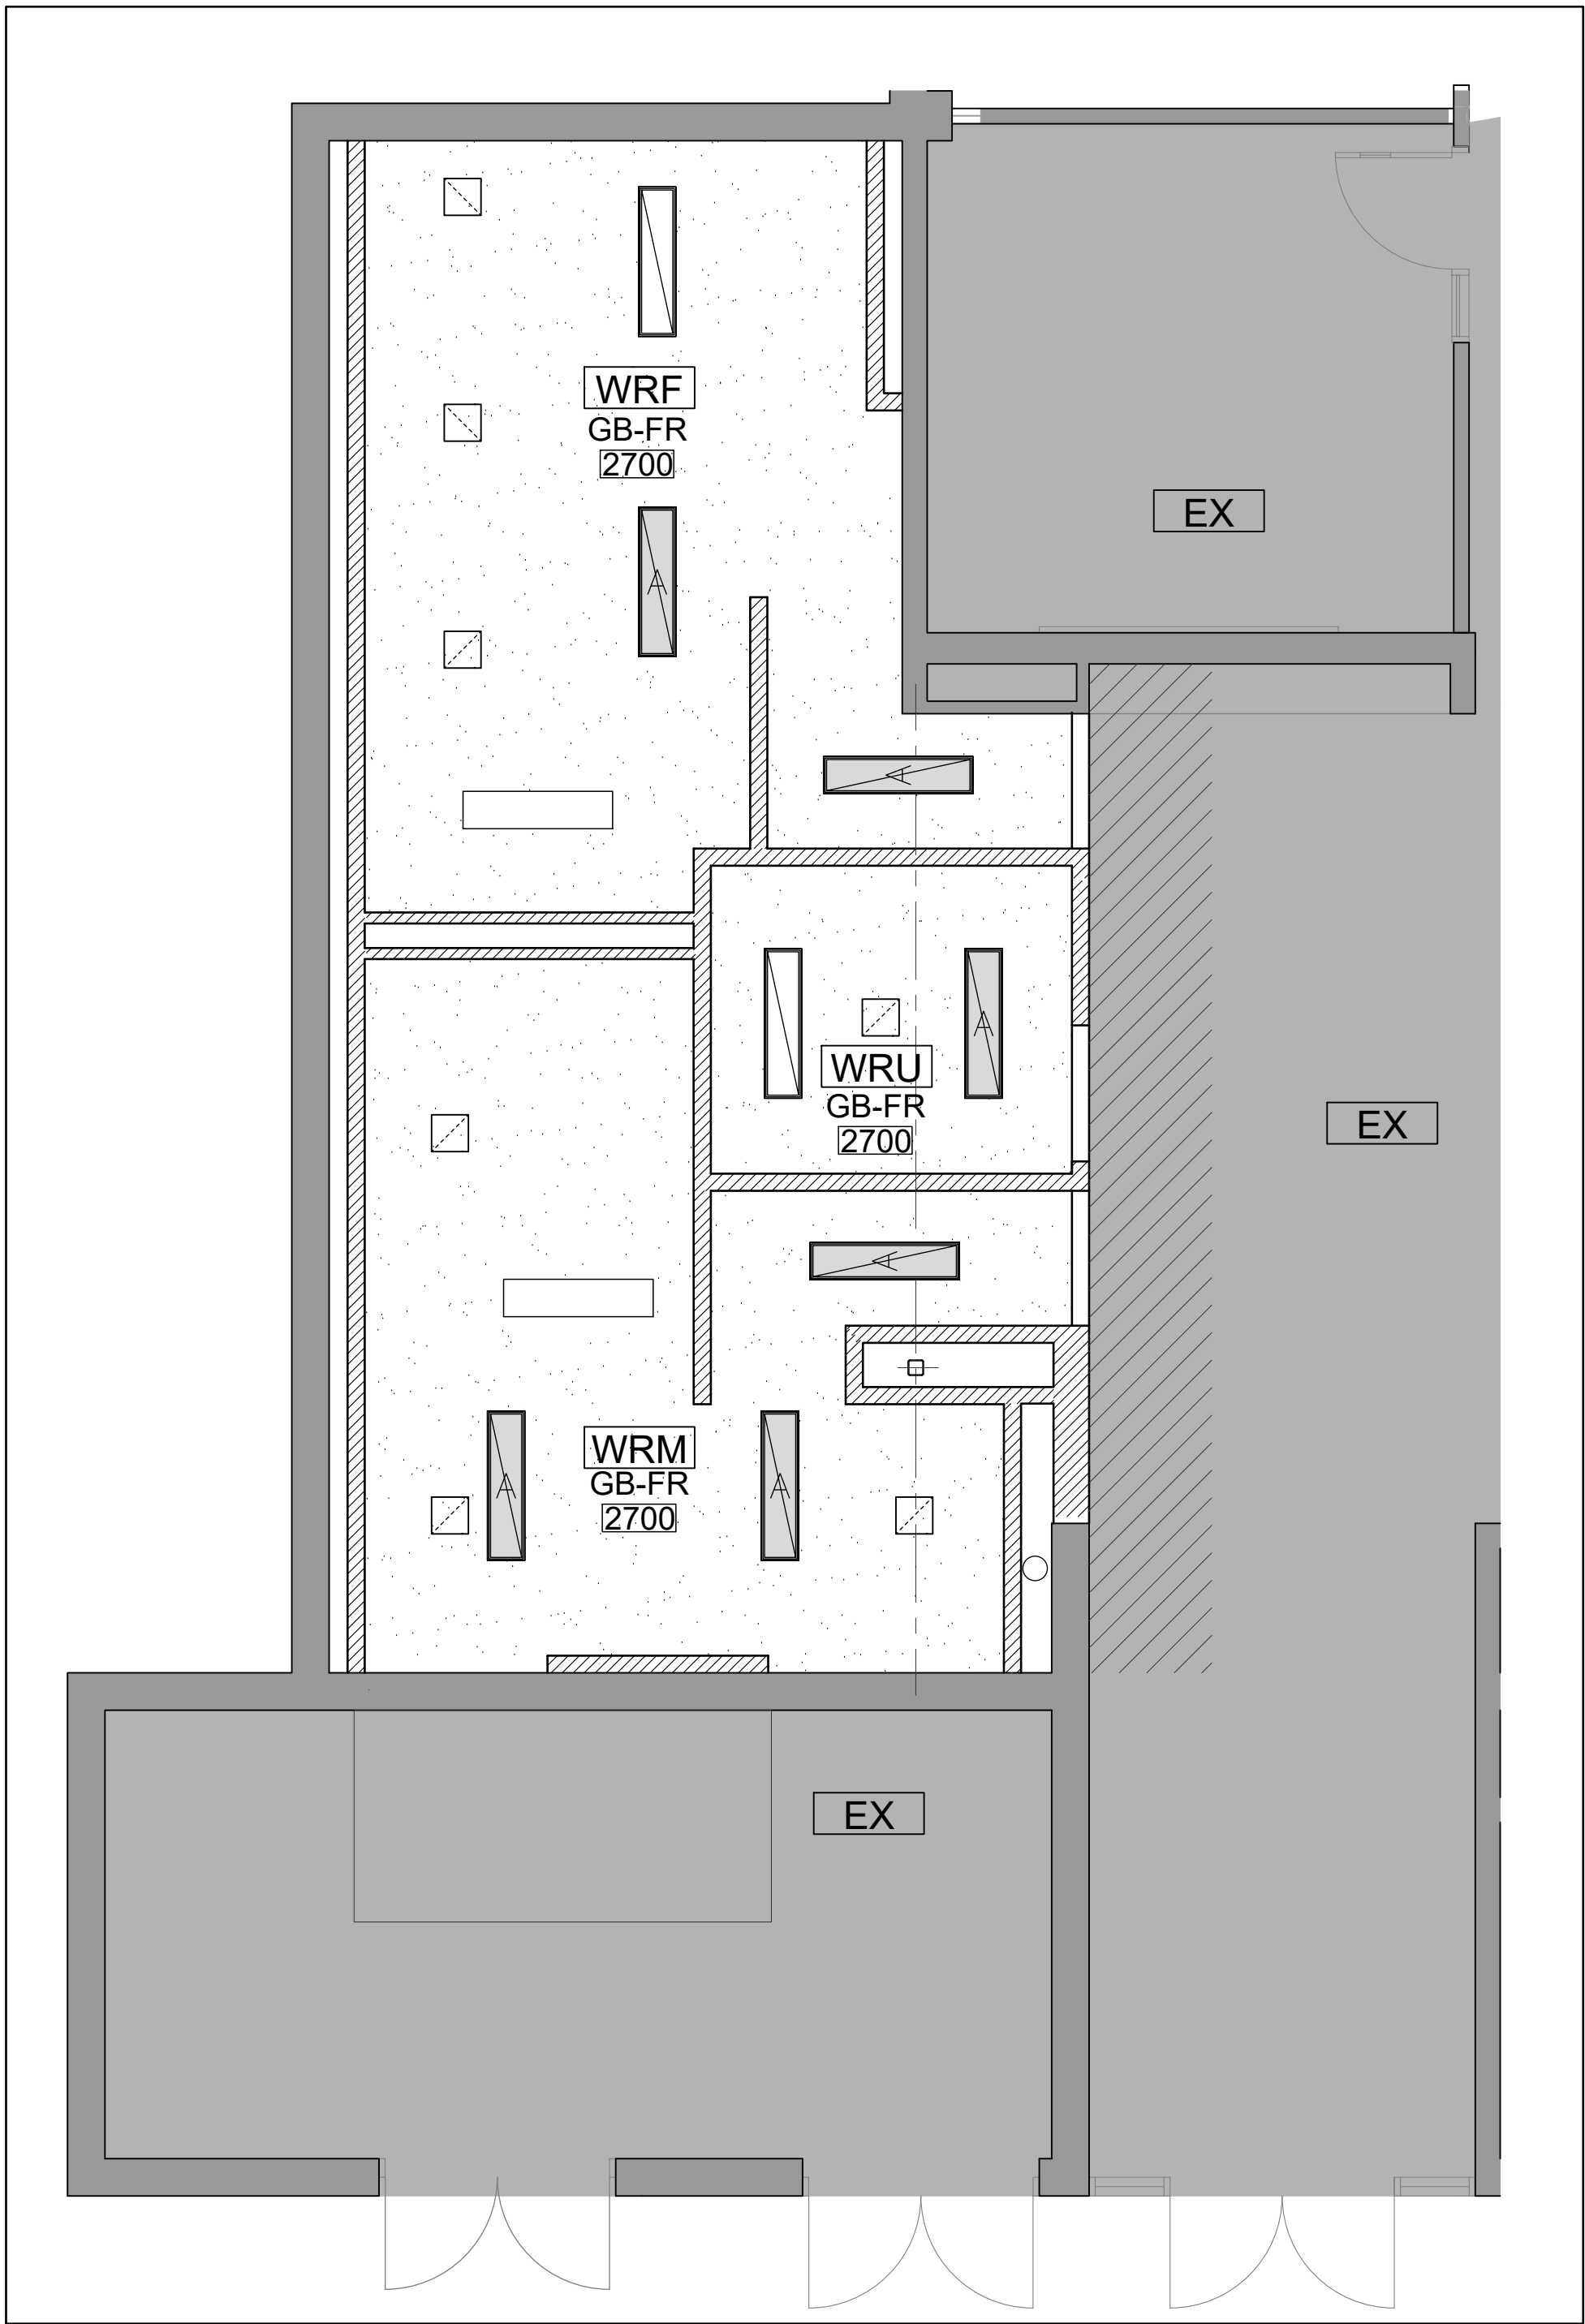


2 REFLECTED CEILING PLAN
A101 1:50

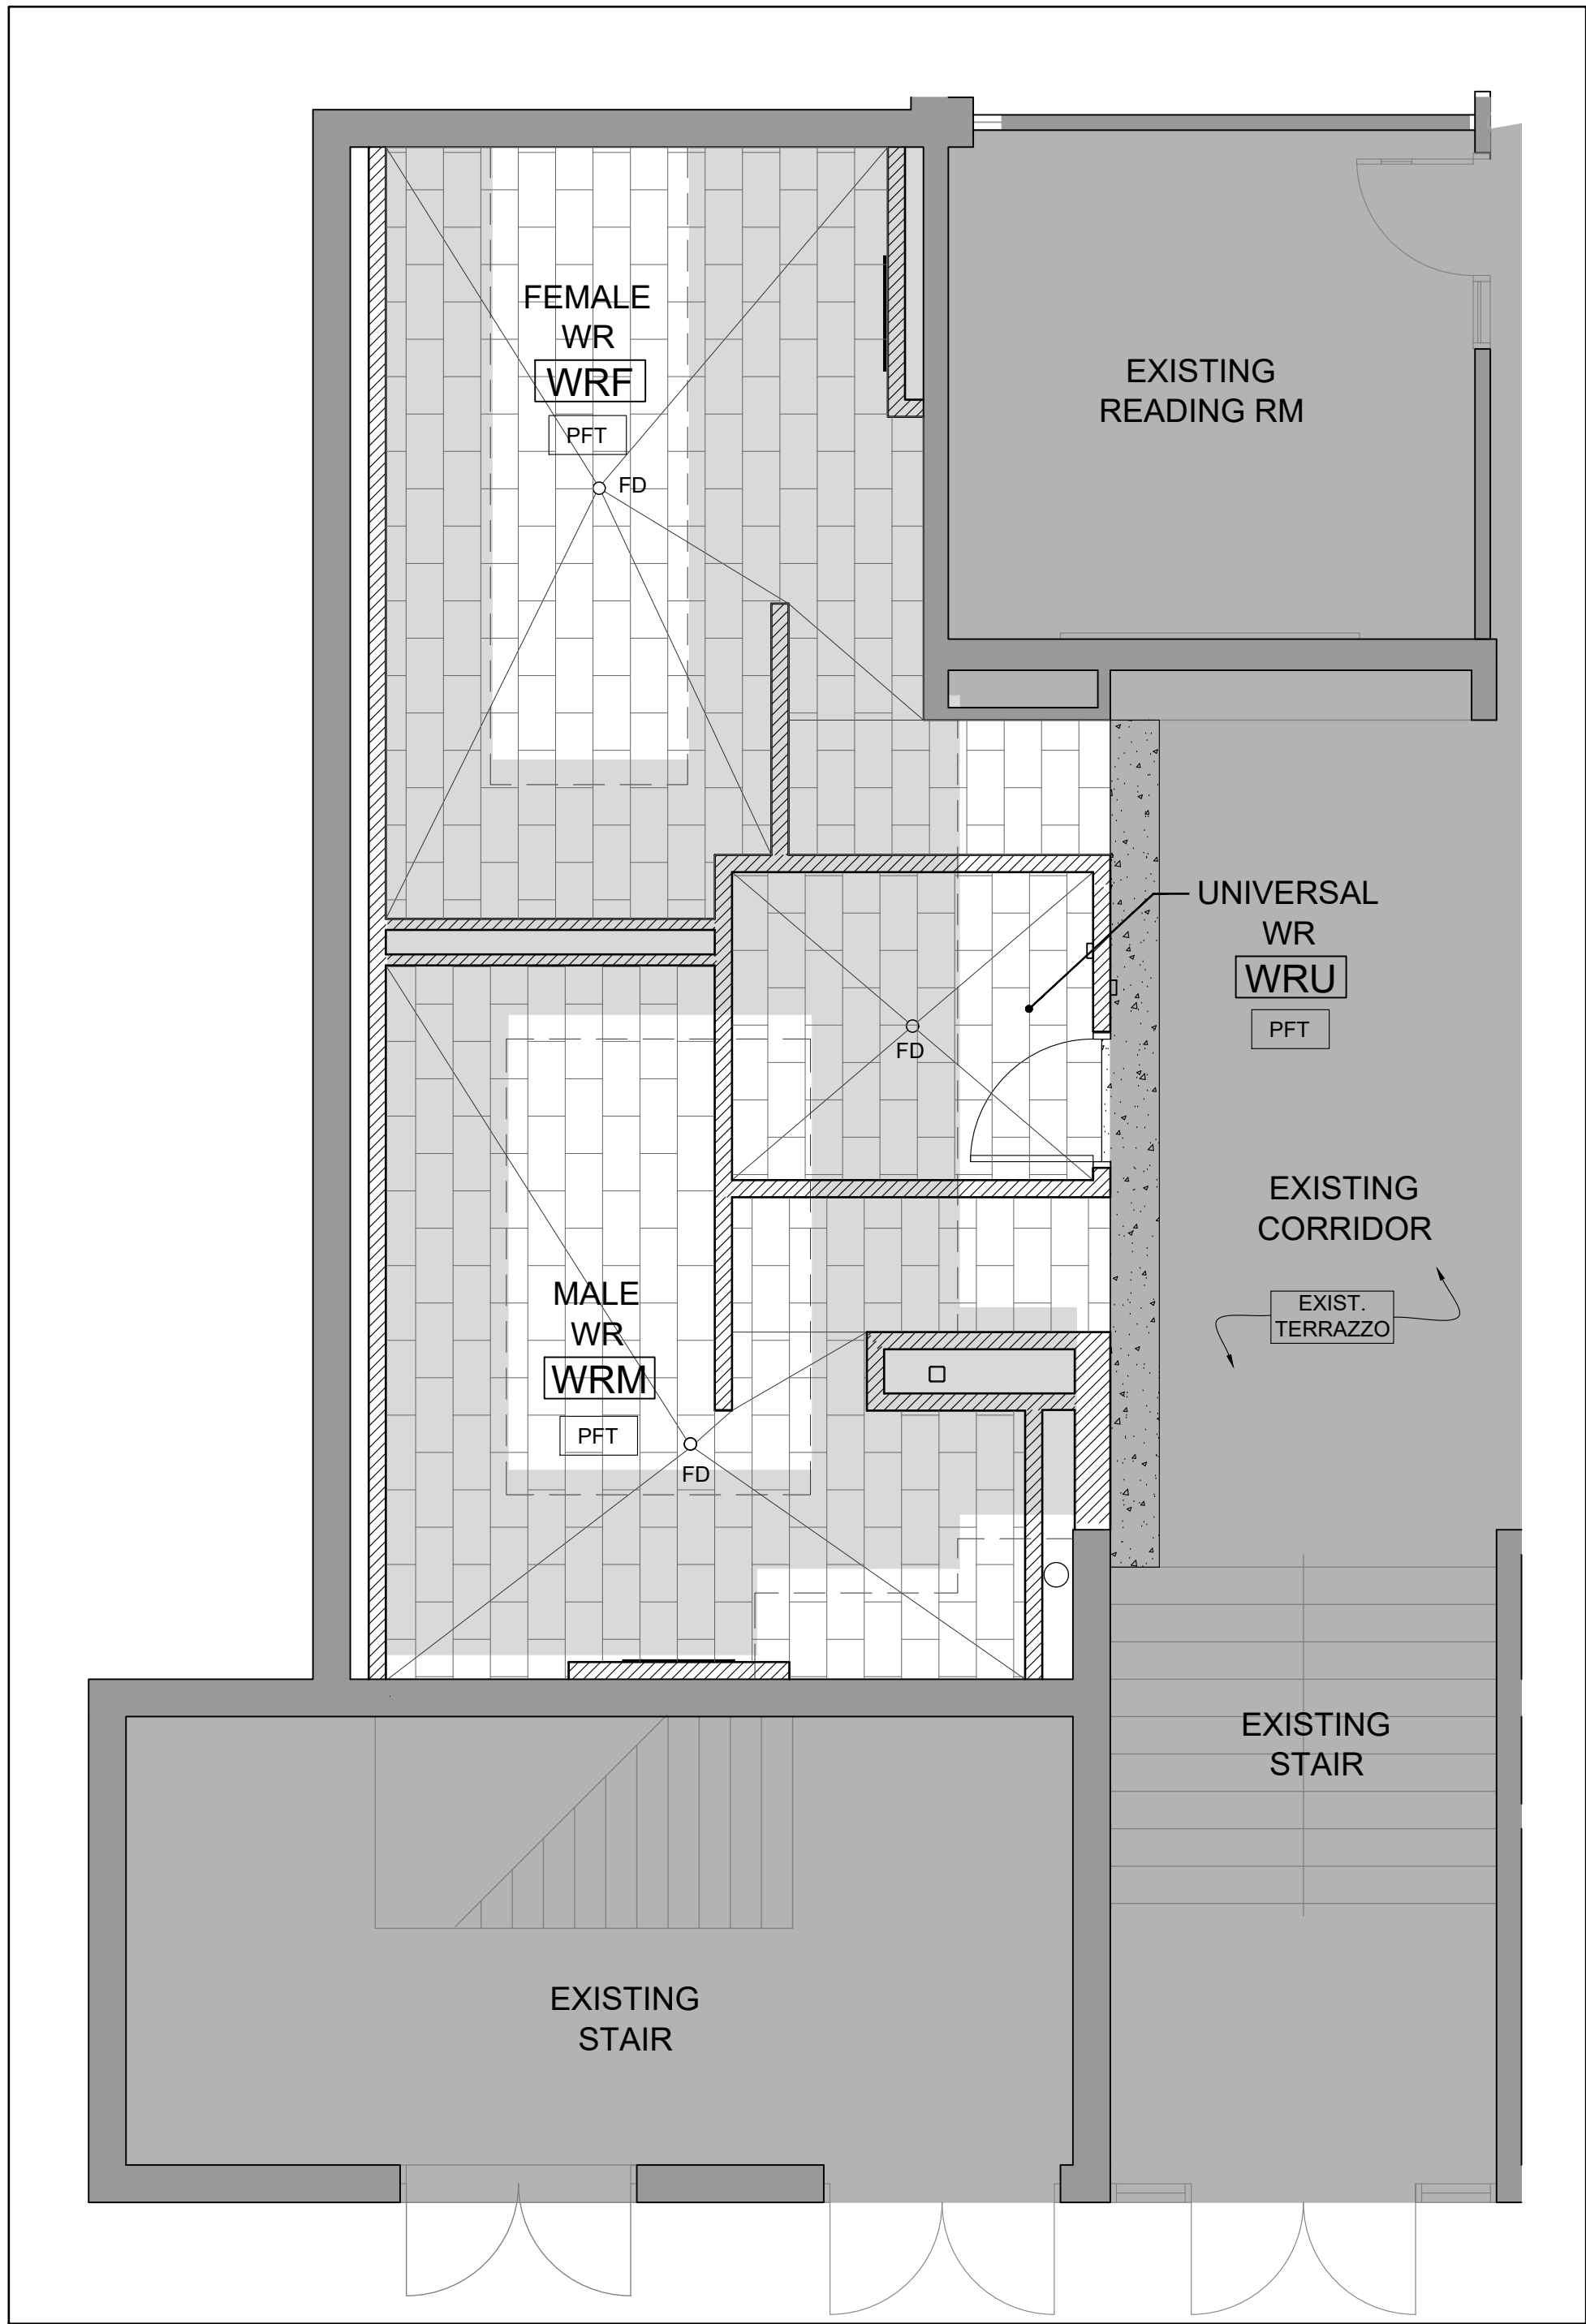


3 FLOOR FINISH PLAN
A101 1:50

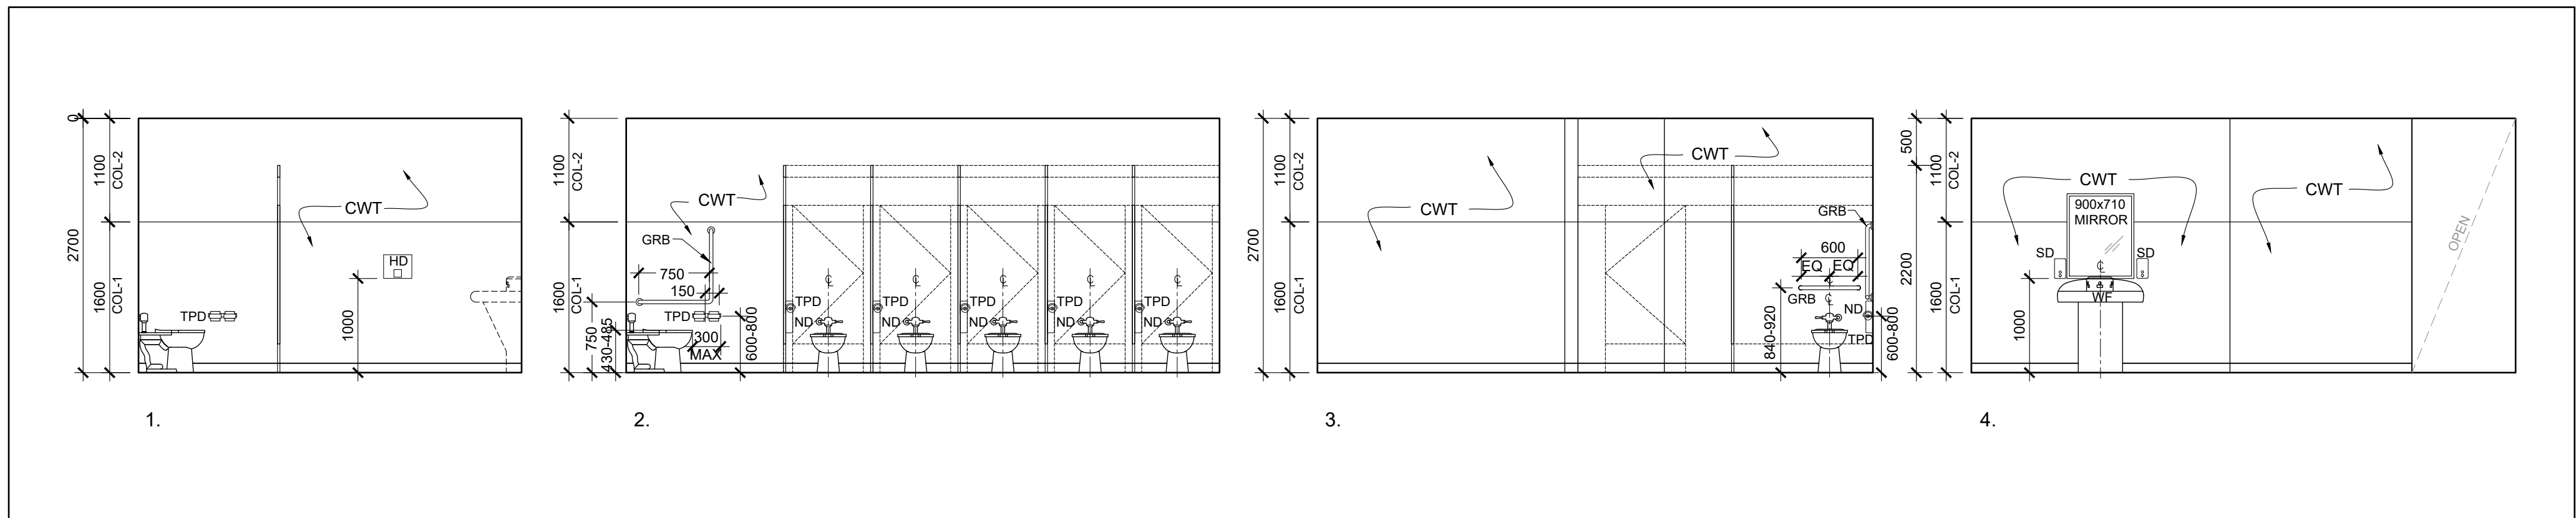




4 INTERIOR ELEVATIONS
A101 1:50

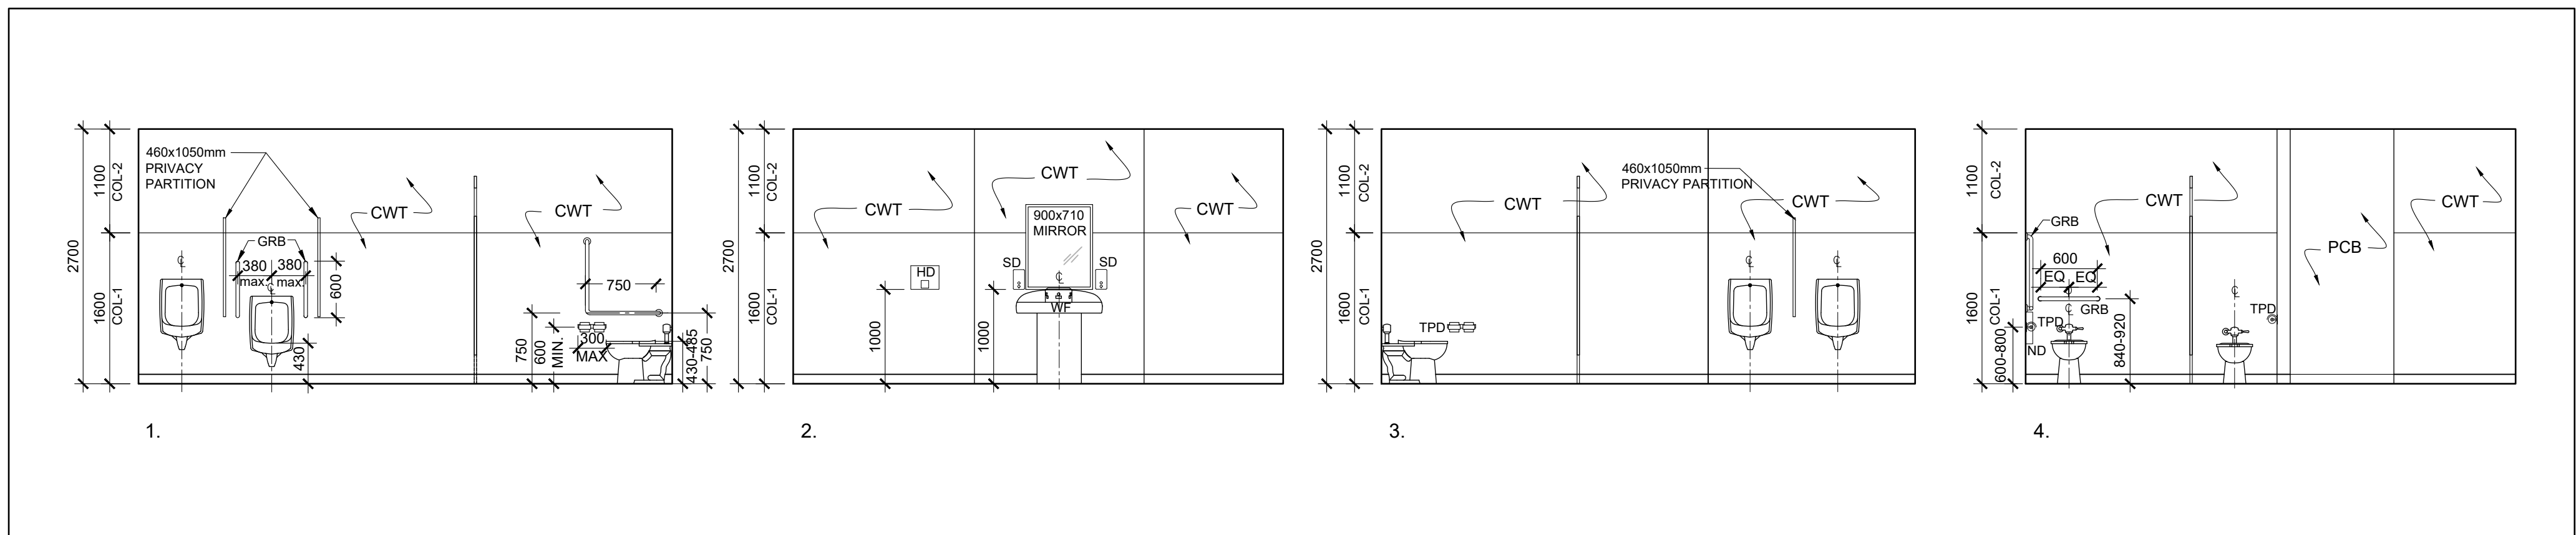

5 INTERIOR ELEVATIONS
A101 1:50

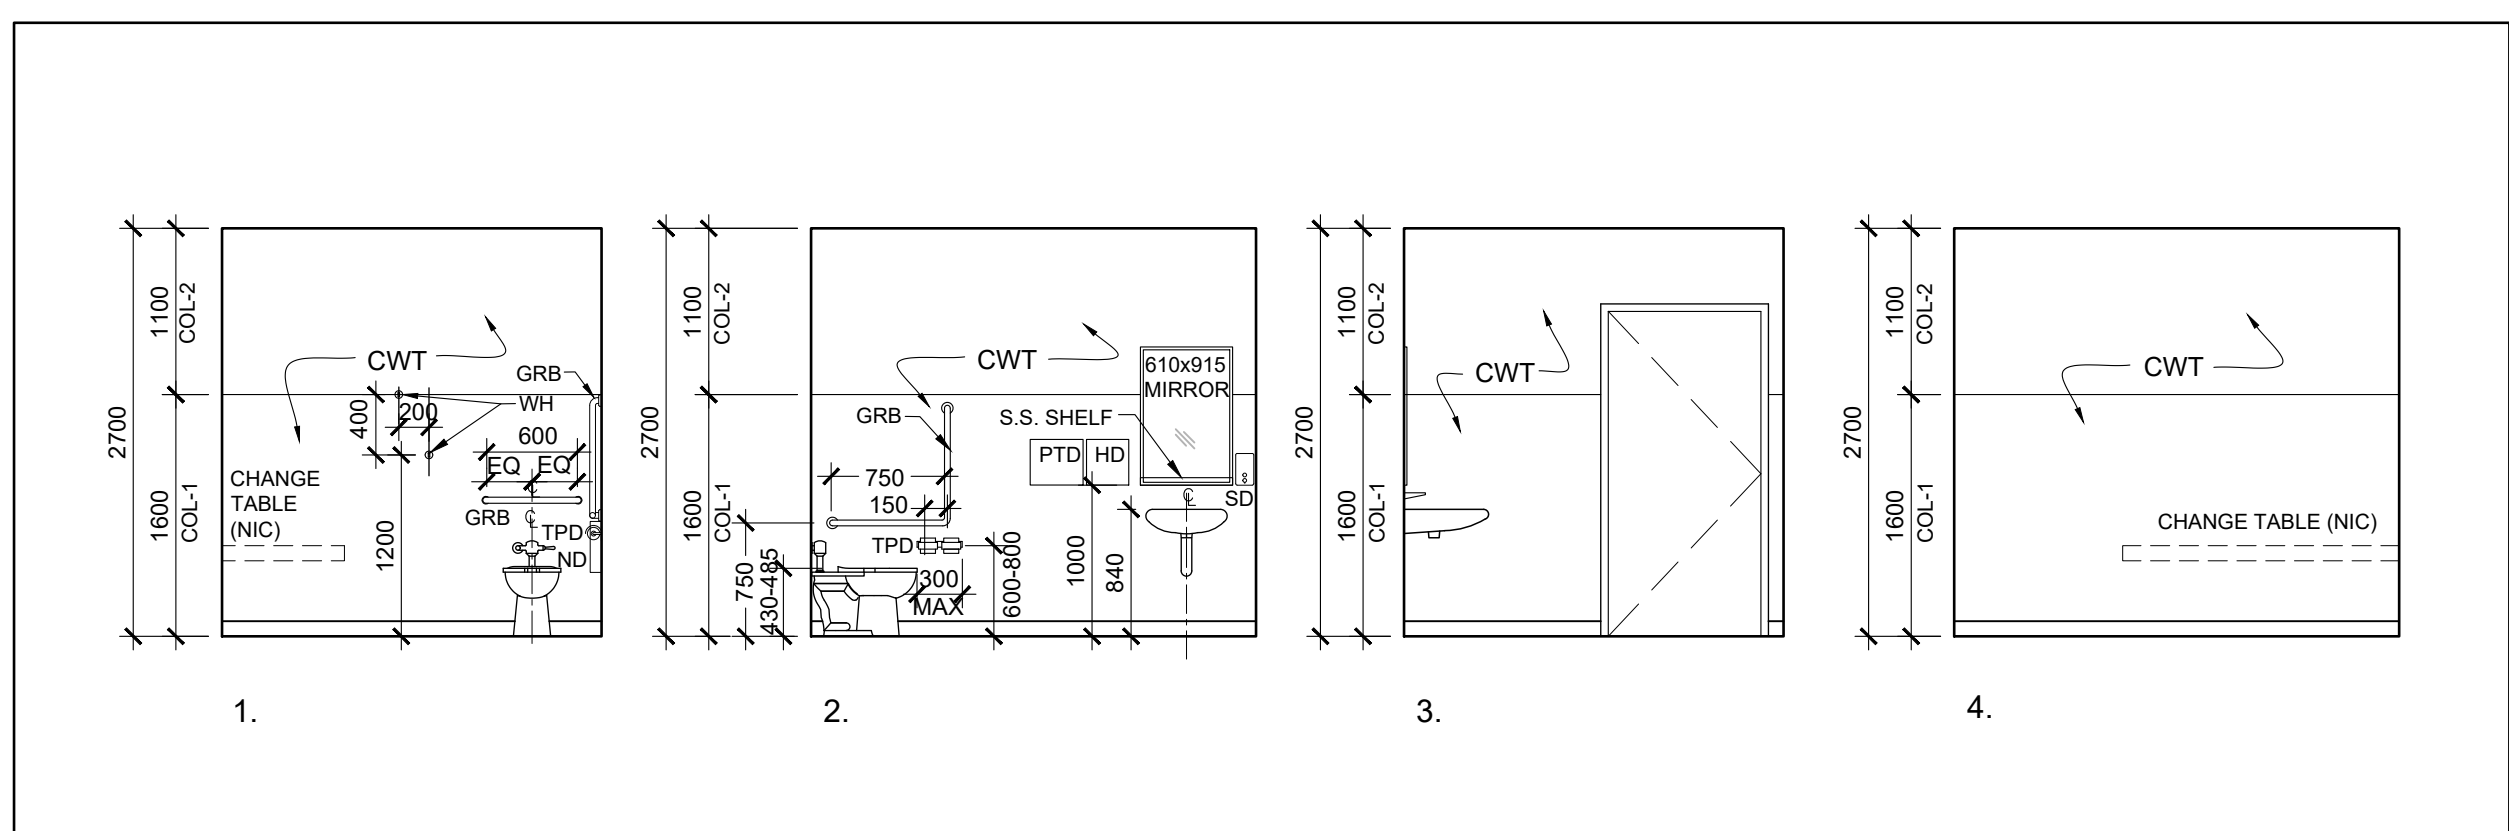

6 INTERIOR ELEVATIONS
A101 1:50

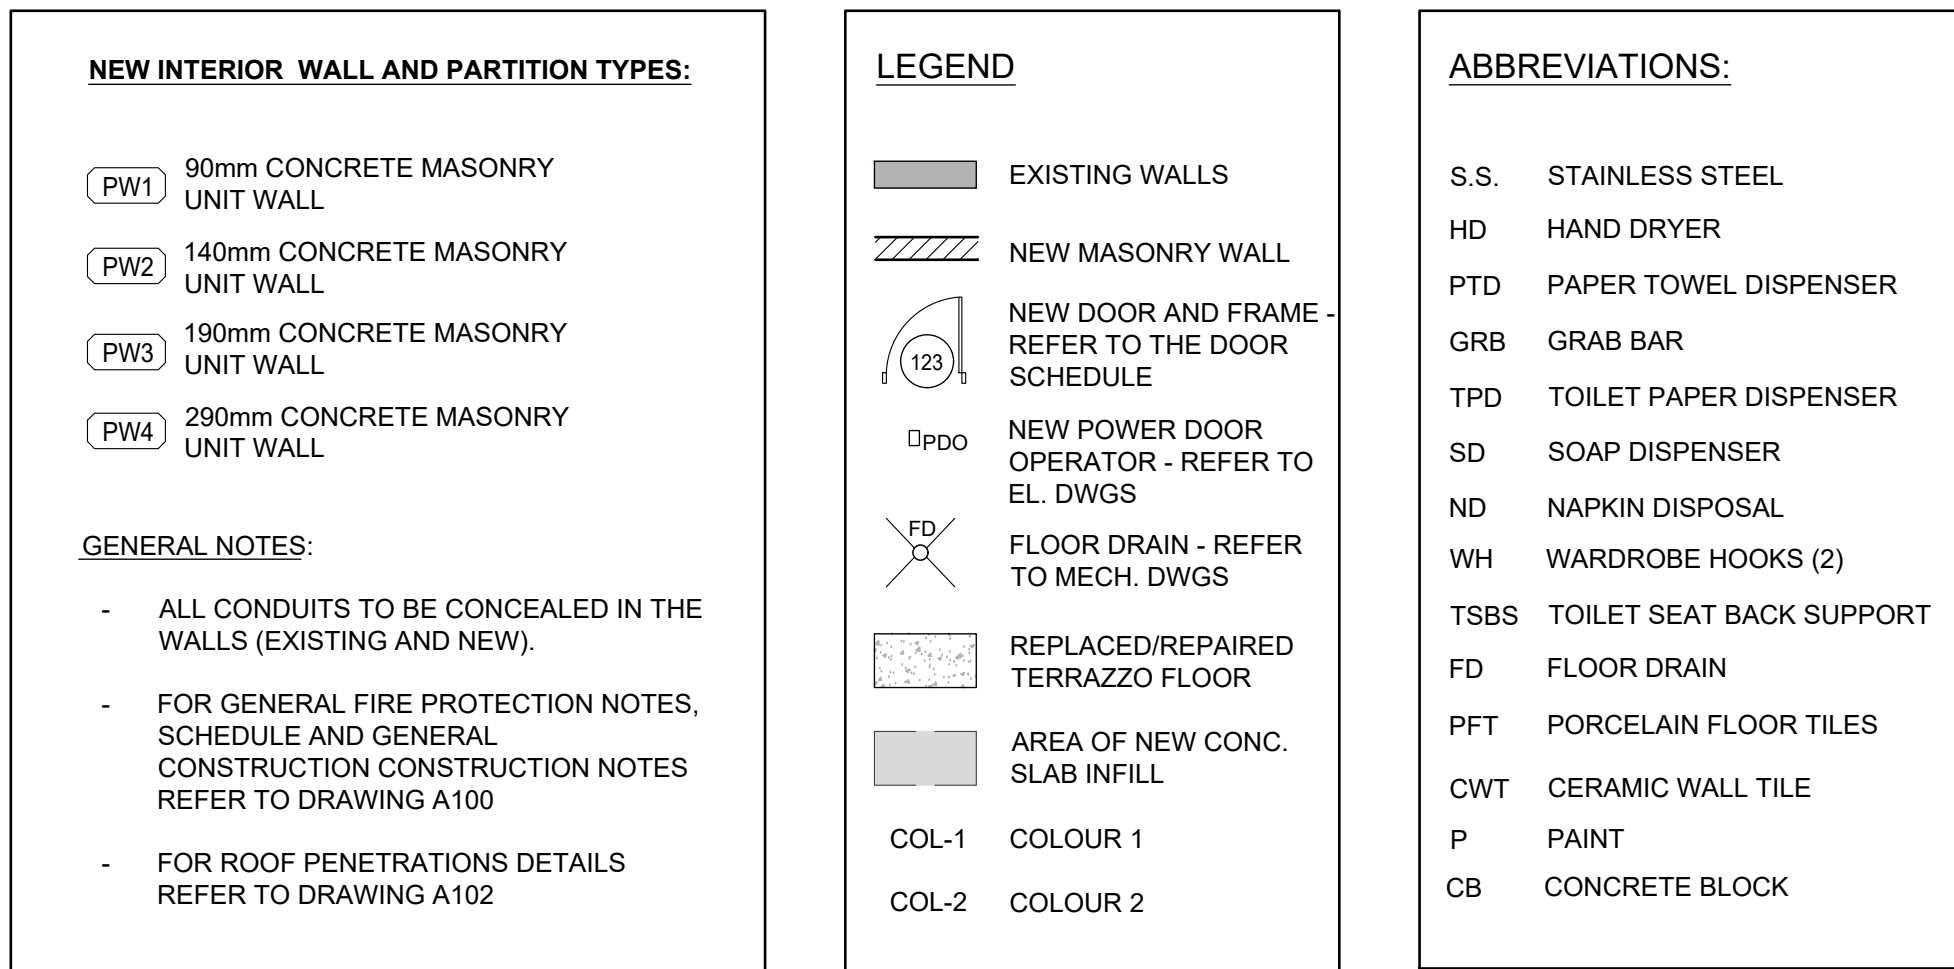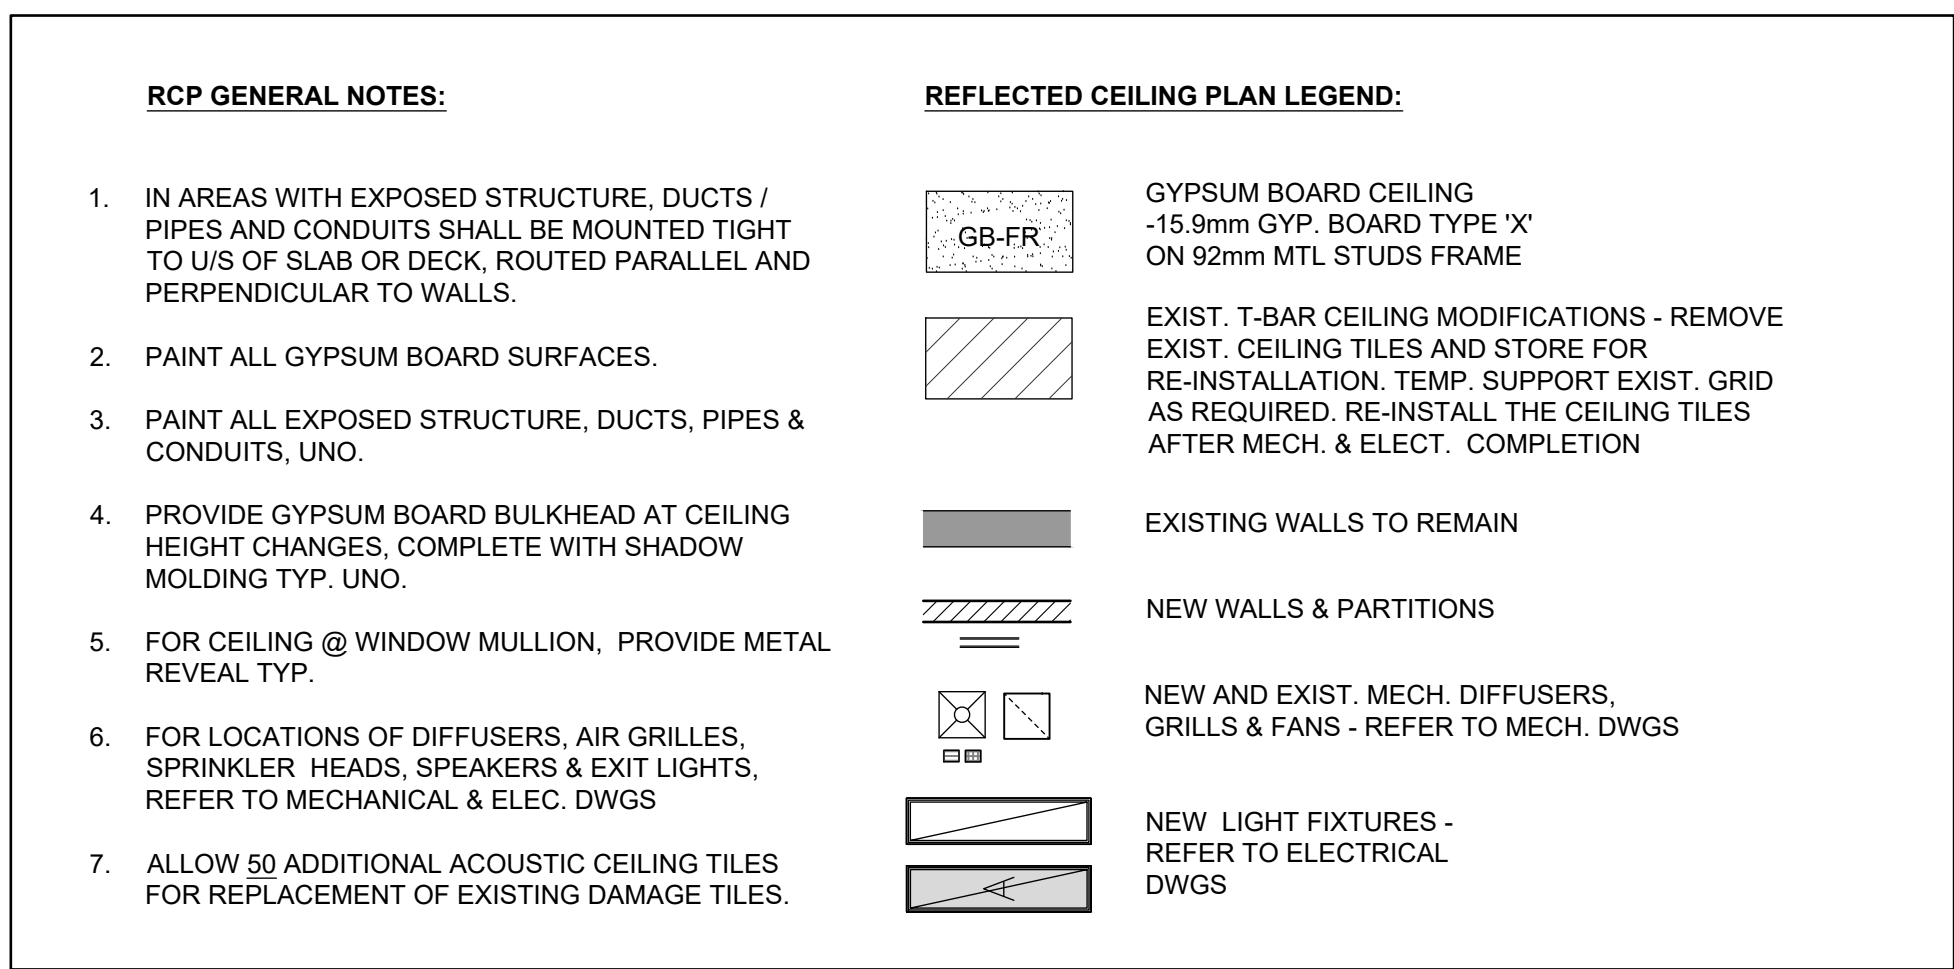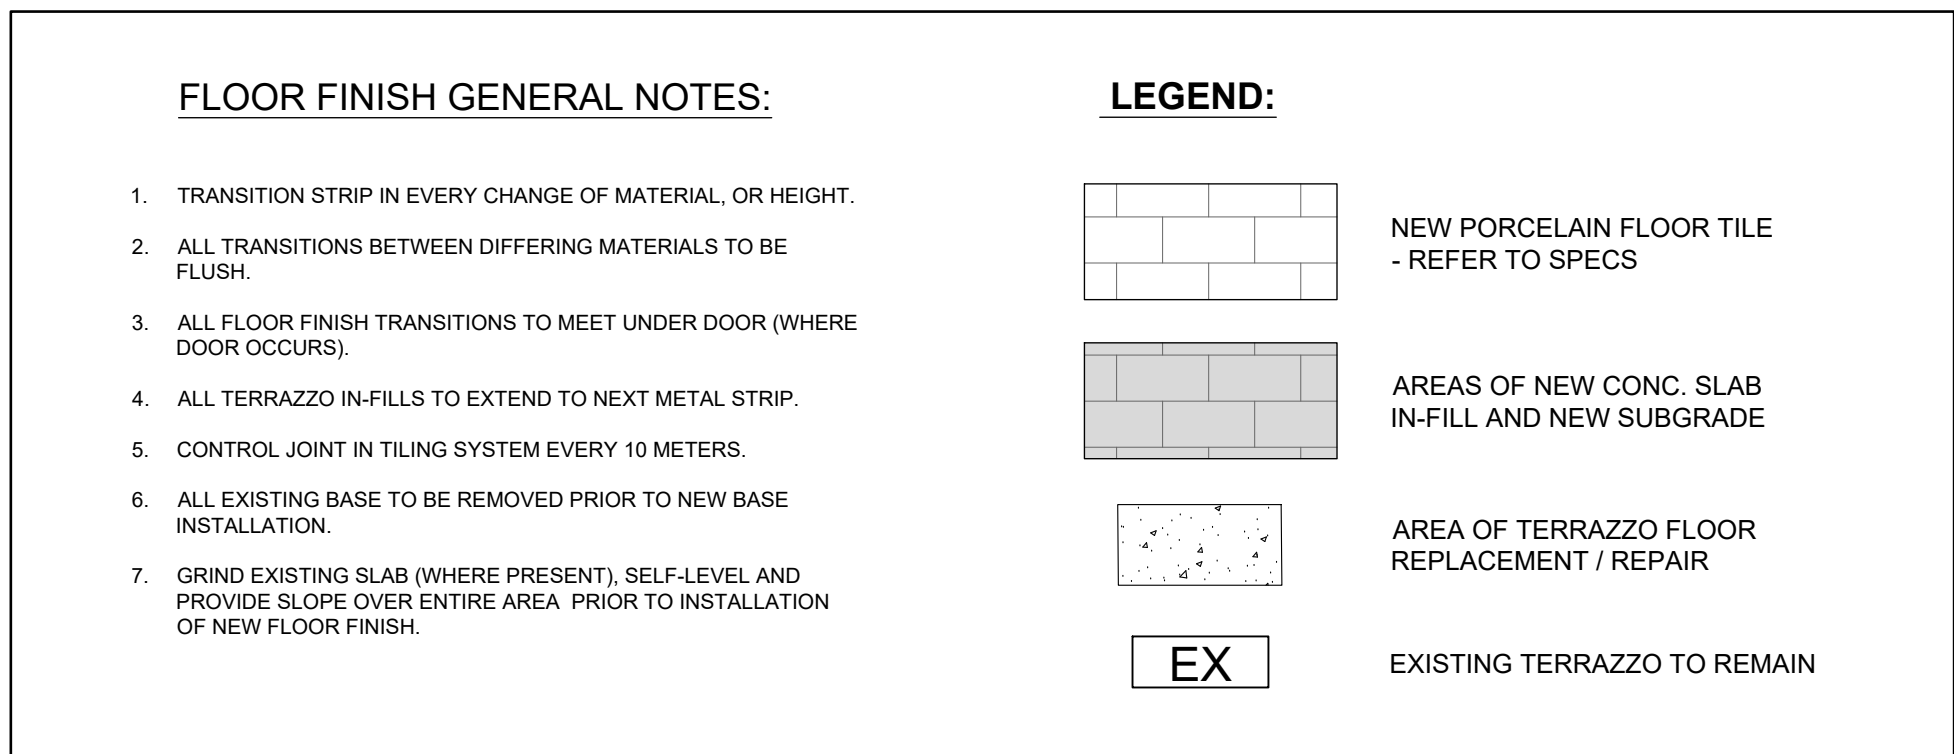

Client
Halton District School Board
2050 Guelph Line
Burlington, Ontario

T. A. BLAKELOCK H.S. RENOVATIONS

1160 Rebecca Street
Oakville, ON

Architect
snyder
Snyder Architects Inc.
100 Broadview Ave. Suite 201, Toronto, ON M4M 3H1
Tel: 416.593.3442 Fax: 416.593.4463
www.snyderarchitects.ca

Consultants
Structural Consultants
Kalos Engineering Inc.
300 York Boulevard
Hamilton, Ontario, L8R 3K6
Tel: 905-333-9119
Mechanical and Electrical Consultants
EXP
1266 S. Service Rd.
Stoney Creek, Ontario, L8E 5R9
Tel: 905-625-6069



No.	Revisions	Date
2	ISSUED FOR TENDER	2025-04-17
1	ISSUED FOR BUILDING PERMIT	2025-04-08
No.	Issue	Date

General Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawings. Drawings shall not be used for construction purposes until issued by the Architect for construction.



Drawing Title:
LIBRARY WASHROOMS FLOOR PLAN, RCP AND INTERIOR ELEVATIONS


Scale: AS NOTED Date: 2025 01 31
Drawn by: Checked by:
Job No. Drawing No.

2215-C A101

 EXISTING LIGHTING FIXTURE TO REMAIN

D3 REMOVE AND DISPOSE EXISTING LIGHTING & HVAC FIXTURES AND OTHER DEVICES. MAKE GOOD AFFECTED SURFACES TO RECEIVE NEW WORK. COORDINATE WITH MECH & ELEC. DRAWINGS FOR ADDITIONAL DEMOLITION SCOPE.

1. REFER TO SPECS & ABATEMENT REPORT REGARDING DESIGNATED SUBSTANCES REMOVAL.
2. ALL DEMOLITION SCOPE SHOWN ON DRAWINGS IS DESIGNATED SUBSTANCES ABATEMENT DOCUMENTS ARCH, STRUCTURAL, MECH & ELECTRICAL. DWGS IS BY SC02 (DEMOLITION AND ABATEMENT SUBSTANCES) AND SC03 (DEMOLITION AND ABATEMENT).
3. ARCHITECTURAL DEMOLITION DRAWINGS MUST BE READ IN CONJUNCTION WITH STRUCTURAL, MECH, AND ELEC DEMOLITION DRAWINGS. REFER TO STRUCTURAL, MECH, & ELEC DEMOLITION DRAWINGS FOR COORDINATION.
4. CONTRACTOR TO PATCH, REPAIR, AND MAKE GOOD ALL HOLES OR DAMAGE DUE TO GENERAL DEMOLITION ON EXISTING MASONRY SURFACES TO REMAIN.
5. CONTRACTOR TO FILL IN AND FINISH FLOORS LEFT ON THE FLOORS OR WALLS AFTER DEMOLITION TO MATCH WITH EXISTING SURROUNDING MATERIALS.
6. CONTRACTOR TO ENSURE THAT THE PORTION OF THE BUILDING BEING RETAINED IS HATCHED BACK TO THE EXISTING FOUNDATION. ALL CONSTRUCTION IN A CONDITION SIMILAR TO ITS EXISTING CONDITION OR BETTER. THIS REQUIREMENT INCLUDES PROVISION OF THE NECESSARY PROTECTIVE MEASURE LINE SECURITY PROTECTION FOR THE ELEMENTS AND WEATHER HEATING/DEHUMIDIFICATION AS NECESSARY, ETC.

[illegible]

General Contractor shall check and verify all dimensions and report all errors and omissions to the Architect. Do not scale the drawings. Drawings shall not be used for construction purposes until issued by the Architect for construction.



Job No.	Drawing No.
---------	-------------

2210 0	7100
--------	------